

Location: \_\_\_\_\_




**R1200-Z**

**LARGE SUMP DEXOTEX ROOF DRAIN WITH WIDE DECK FLANGE FOR A LIQUID MEMBRANE ROOF**

**Specification:** MIFAB® Series R1200-Z lacquered cast iron deep sump roof drain with 20" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

**Function:** Used in flat roofs and decks designed for promenade or recreational areas where traffic bearing roof deck covering is used. Large free area dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

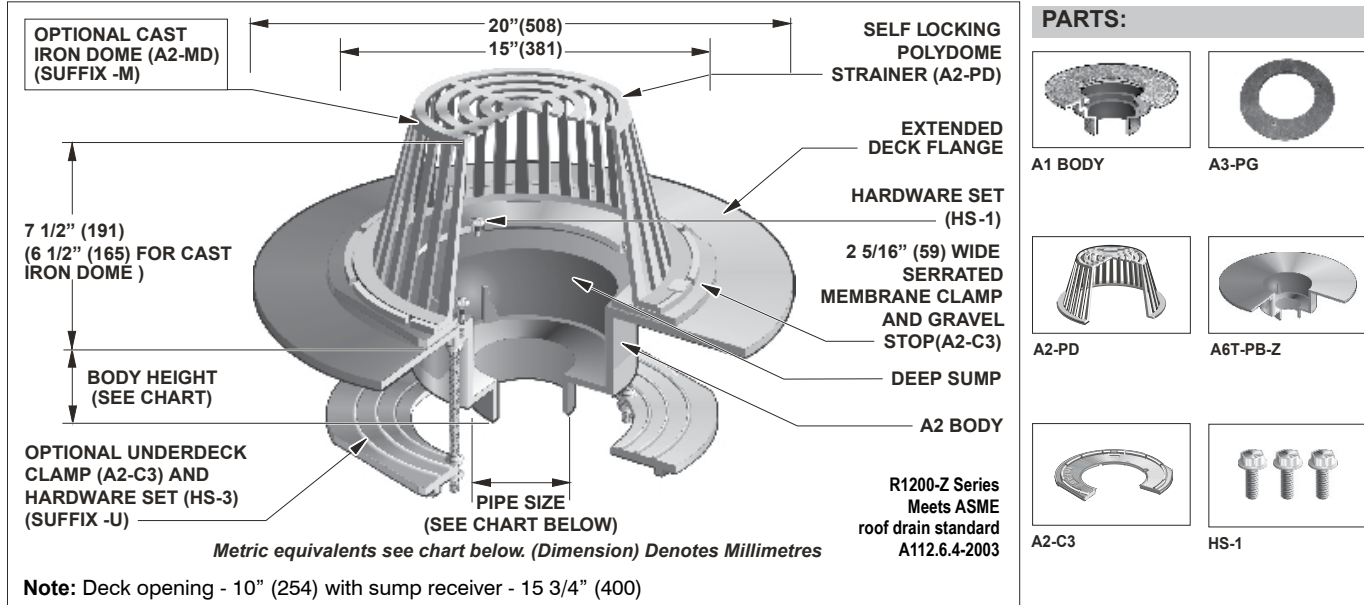

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	5 3/4" (146)	5 1/2" (140)	6 1/2" (165)	6 1/2" (165)	6 3/4" (171)
3" (76)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 1/2" (165)	7 1/2" (191)
4" (102)	5 3/4" (146)	5 1/2" (140)	5 1/2" (140)	6 1/2" (165)	7 5/8" (194)
5" (127)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 3/4" (171)	-
6" (152)	7 1/4" (184)	5 5/8" (143)	5 5/8" (143)	6 1/2" (165)	-
8" (203)	5 7/8" (149)	N/A	N/A	(A7-8X body)	-

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome (metal dome only)	-JC	S.S. ballast guard with secondary clamp
-11	Acid resistant epoxy coating	-M	Metal dome
-12	Galvanized metal dome	-M-80	Low profile silhouette aluminum dome
-12A	Galvanized body and membrane clamp	P	Push on outlet
-12B	Galvanized metal dome and membrane clamp	-PA	Pennsylvania Steel Act compliant product
-13	Galvanized body, membrane clamp and dome	-R	2" external water dam
-28	Stainless steel body (Type 304) (2", 3", 4")	-RG	RoofGuard non clogging cast iron dome
-30	PVC socket connection body	T	Threaded outlet (2",3",4")
-31	ABS socket connection body	-U	Underdeck clamp
-81	Rough bronze dome	-U3	Underdeck clamp with cutaway side
-83	Stainless steel mesh screen over dome	-V	Fixed Static Extension 2", 3", 4"
-90	Threaded side outlet (2",3",4")	-VG	Galvanized fixed extension (2",3",4")
-90-NH	No Hub side outlet (cast iron only) (2", 3", 4")	-W	Adjustable water dam
(Standard)	No hub outlet	-W-1	Water proofing flange
-B	Sump receiver	-W1	Water proofing flange (A8-W-1)
-BA	Minimum 51% material cost made in the USA	-W2	2" internal water dam
-E	Adjustable extension	-W3	3" internal water dam
-EG	Galvanized Adjustable extension	-W4	4" internal water dam
-F1, -F2, -F3	Accuflow (parabolic weir) specify	-W6	6" diameter adjustable water dam
-G	Stainless steel ballast guard	X	Inside caulk outlet (2",3",4")
-HC	Adjustable ballast guard with sec. clamp	-XJ	Vertical expansion joint (see R1900)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_

Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_