


## R1220-G

## MEDIUM SUMP I.R.M.A ROOF DRAIN WITH STAINLESS STEEL BALLAST GUARD

**Specification:** MIFAB® Series R1220-G lacquered cast iron medium sump roof drain with 12" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, 5" high stainless steel ballast guard and standard self-locking cast iron dome strainer with a free area of 71.50 square inches.

**Function:** Used in any type of flat roofs where a medium sized drain is required. Wide anchor flange and membrane clamp with deep groove design provides for secure grip of membrane and roof flashing materials. Ballast guard prevents ballast from entering drain line.

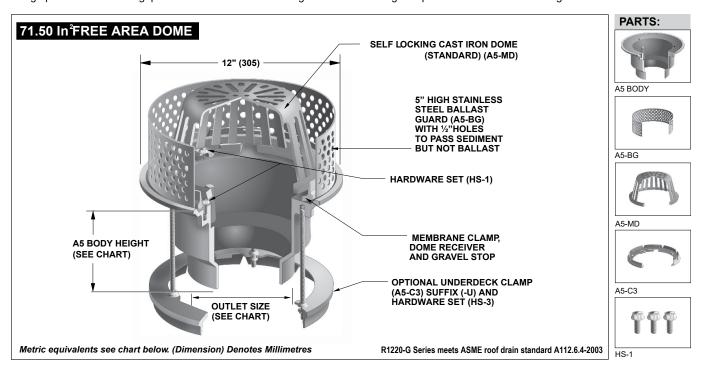

PIPE SIZE	BODY HEIGHT		
	NO HUB (STANDARD	INSIDE CAULK (X)	
2" (51)	6 1/2" (165)	6.575 (167)	
3" (76)	6 1/2" (165)	6.575 (167)	
4" (102)	6 1/2" (165)	6.575 (167)	
6" (152)	6 1/2" (165)	6.575 (167)	

SUFFIX -6	OPTIONAL VARIATIONS Vandal proof dome (metal dome only)	SUFFIX -HC	OPTIONAL VARIATIONS Adjustable ballast guard with sec. clamp
-11	Acid resistant epoxy coating	-JC	S.S. ballast guard with secondary clamp
-12	Galvanized metal dome	-PA	Pennsylvania Steel Act compliant product
-12A	Galvanized body and membrane clamp	-R	2" external water dam
-13	Galvanized body, membrane clamp and dome	-RG	RoofGuard non clogging cast iron dome
-83	Stainless steel mesh screen over dome	-U	Underdeck clamp
-B	Sump receiver	-U3	Underdeck clamp with cutaway side
-BA	Buy America Act compliant product	-W-1	Water proofing flange
-C	Secondary clamp	X	Inside caulk outlet (2",3",4")
-E	Adjustable extension	-XJ	Vertical expansion joint (see R1900)
-EG	Galvanized Adjustable extension	-Z	Extended wide elastomeric flange (20" diameter x 1/4" thick)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No: