

RG2016DGC



CAST IRON REPLACEMENT SCUPPER DRAIN

Specification: MIFAB® - RoofGuard Model RG2016DGC cast iron replacement scupper drain with an extra large, horizontal slotted, free area drainage design. The RoofGuard has a 10 year limited warranty.

WHY RoofGuard?

MAKE ROOF DRAINS UNCLOGGABLE


RoofGuard ELIMINATES STANDING WATER:

- · Patented design increases surface area by up to 5x or more making a RoofGuard protected drain virtually uncloggable. RoofGuard SAVES \$\$
- RoofGuard works 24/7.
- Eliminates leaks and costly repairs caused by clogged
- RoofGuard will replace any scupper drain.
- Installation is fast, simple, and requires no tools.
- Removable Top allows easy access to drain and piping without detaching RoofGuard.


8 piece multi pack box for the plastic RoofGuard scupper drains

INSTALLATION:

- 1. Remove packaging and take adjustable top off of the RoofGuard housing.
- 2. Remove any screening around scupper opening.
- 3. Clean and dry roofing membrane.
- 4. Overfill the 4 attachment pods on the bottom of RoofGuard with an exterior water proof adhesive (M-1 or similar). Make sure the pods are full and over flowing with the adhesive to ensure proper bonding to roofing membrane.
- 5. Turn RoofGuard over and install with the scupper opening centered on the flat platform on RoofGuard. Install as close as possible to the scupper opening.
- 6. Size the RoofGuard top to scupper opening and then install on RoofGuard platform. The top can be adjusted to slide inside of scupper opening or go over
- 7. Slide adjustable top into desired position so that the top protects scupper opening.

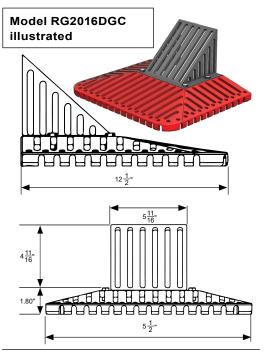

Cast iron scupper drain, less MIFAB® body for retrofit applications.

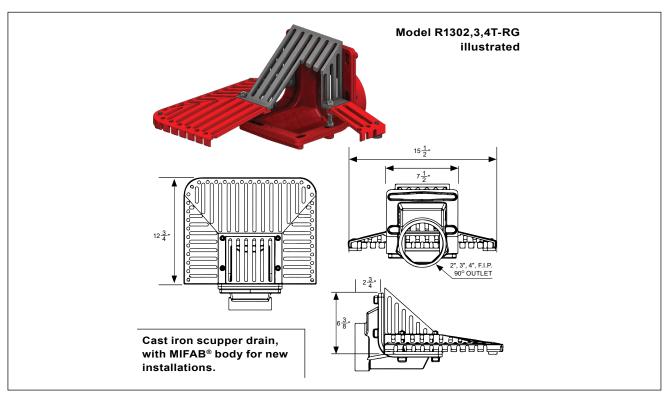

| Job Name: | Page No: |
|--------------|--------------------|
| Section No: | Contractor: |
| Schedule No: | Purchase Order No: |