

Location: _____




RTOS

**TOP SET® RETROFIT COVER & FRAME
UNIVERSAL REPLACEMENT ASSEMBLY**

Specification: MIFAB® RTOS(*) (*specify cover material) 5" round Top Set retrofit cover and frame with allen key vandal resistant stainless steel screws in cover and Phillips head screws within the universal bottom ring for vertical and side to side adjustment.

Function: Used in showers, kitchens, restrooms and any other floor areas. It is designed to replace the 5" diameter cover from any Zurn, Smith, Josam, Wade, Watts or MIFAB cleanout. Simply remove the existing JaSaWaZ cover, place the RTOS bottom universal ring into the recessed area of the cover and connect it with the existing JaSaWaZ cover screws. The RTOS cover and frame can then be adjusted vertically and side to side to meet the finished floor.

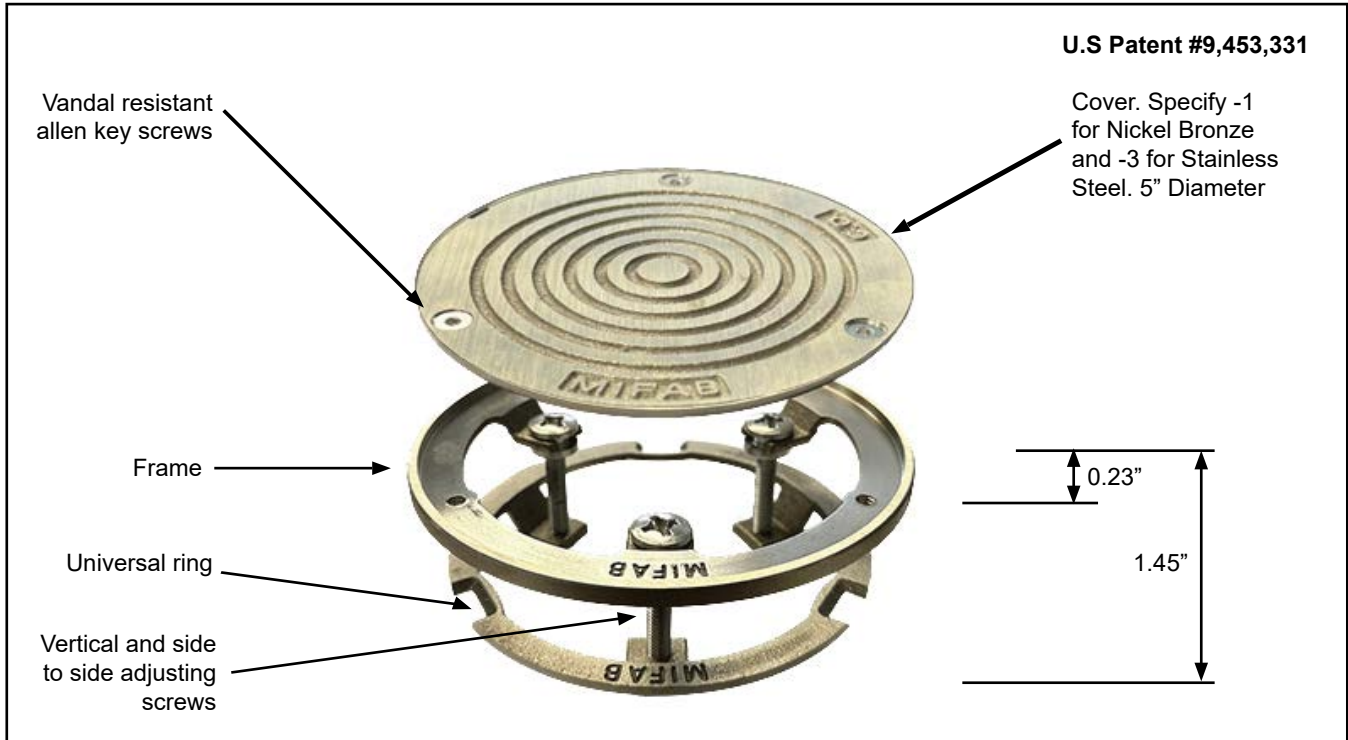

MODEL #	MATERIAL
RTOS-1	5" Diameter retrofit cover and frame - nickel bronze
RTOS-3	5" Diameter retrofit cover and frame - stainless steel

SUFFIX	DESCRIPTION
-6	Security screws (T-20 Torx & pin)

ADJUSTABILITY: Min = 0.23"; Max = 1.45"

Note: "Phillips" screw driver needed to adjust Top Set screws.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____