



Grease Interceptors

Extra Large H.D.P.E. Interceptors




Corroded Concrete Interceptor
Typical life expectancy is 10 years.



Rusted Steel Grease Interceptor
Typical life expectancy is 5 years.

FEATURES AND ADVANTAGES

- ① **Base for Body**
Standard, 6" base secured to the underside of the interceptor.
- ② **Sample Port Access**
Sample port access is provided standard. Samples of discharge water taken from top opening of outlet piping.
- ③ **H-20 Load Rated Lid**
20,000 Lb. ASSSHTO H-20 load rated steel encased composite lids and collar are standard to withstand heavy loads.
- ④ **Structural Integrity**
Ribbed body design provides extra structural integrity for in ground installations. Body is rotationally molded High Density Polypropylene with a 3/8" uniform wall thickness providing a strong but lightweight body. This allows installation without need of a backhoe or crane.
- ⑤ **H.D.P.E. Material**
High Density Polypropylene (H.D.P.E.), 3/8" rotationally molded material is used in every SuperMax® Grease and Oil Interceptor. H.D.P.E. is less brittle than fiberglass and less likely to crack during installation. H.D.P.E. interceptors have NO environmental impact. Both fiberglass and concrete interceptors have a negative impact on our environment.
- ⑥ **Extensions** ✓ **Key Feature**
With MIFAB's patented extension system, every lid ships with a 24" X 24" piece of ADS corrugated pipe which provides the installer with up to a 37.25" "C" dimension. If a greater "C" dimension is required, the contractor has the option to purchase it from MIFAB® or to buy a length of ADS pipe from their local waterworks wholesaler in order to complete the installation immediately. Flexible extensions make for easier installation where grade may not be level.
- ⑦ **Extra Rough-in Dimension**
Standard "C" dimension is 37.25" which can be field adjusted down to 20.25" resulting in contractors not having to buy extensions as often.

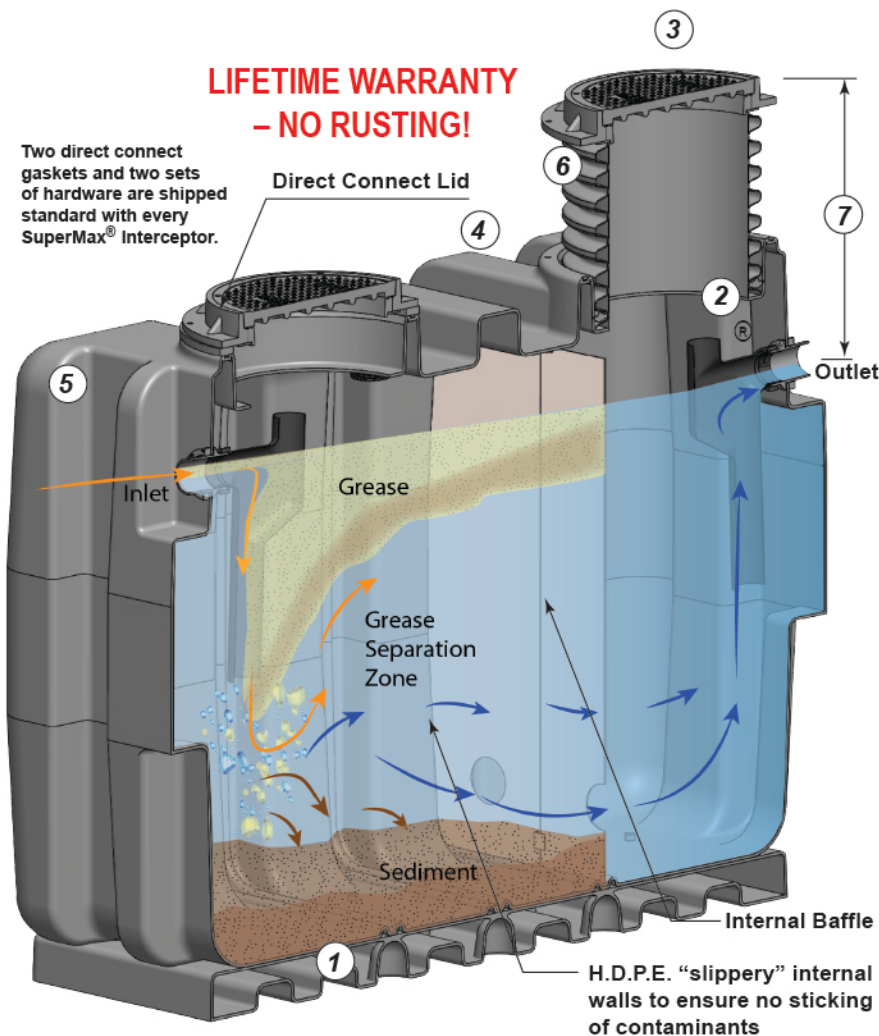

Sizes Available - 500, 750, 1000 1300, 1500
(Liquid Holding Capacity in Gallons)

Represented by:



MIFAB®
www.mifab.com


sales@mifab.com | Toll Free 1-800-465-2736 | Toll Free Canada 1-800-387-3880



Made in the
U.S.A.




LIT-098

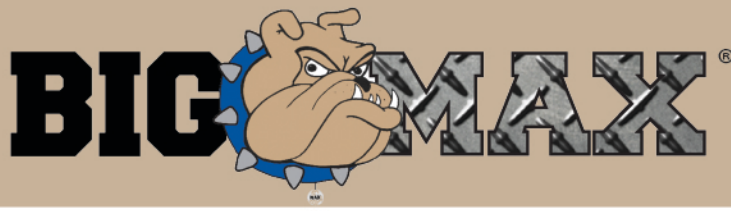

Large Capacity H.D.P.E. Interceptors

for Grease, Oil, Sand,
Fish Scale & Rice

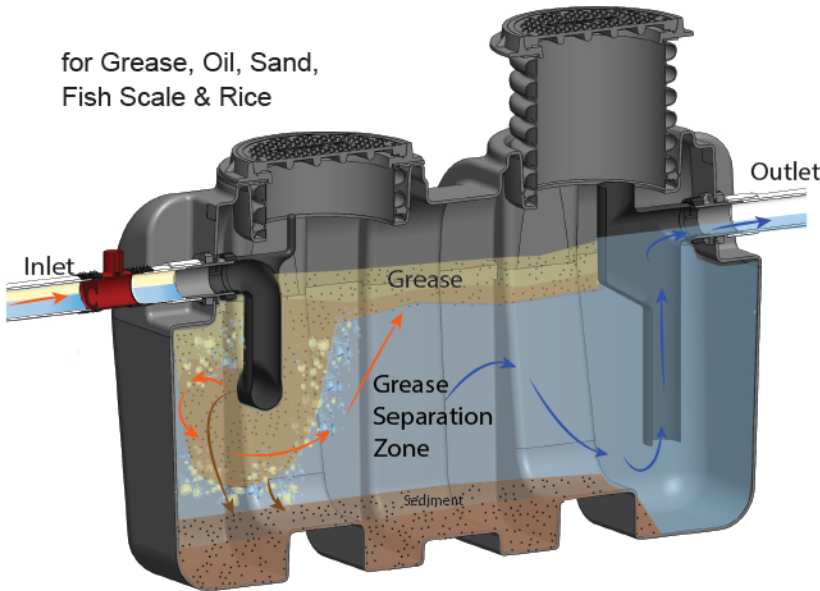

75 GPM
750 lbs Capacity




100 GPM
1,150 lbs Capacity

FEATURES AND ADVANTAGES

- **H-20 Load Rated Lid** as a standard feature.
- **Structural Integrity** – manufactured in the USA out of seamless, rotationally molded High Density Polyethylene
- **Narrow Width** to fit through doors and down stairwells. Can be carried by two people eliminating the need for a forklift.
- **Extensions** – Patented extension system consists solely of one piece 18" dia. ADS pipe (to whichever length contractor needs). Contractor can purchase an extension from MIFAB or buy a length of ADS pipe from your local waterworks wholesaler and cut to whatever length is needed.
- **Superior Product** – with industry approvals to prove it!



H.D.P.E. Interceptors From 7 to 50 GPM

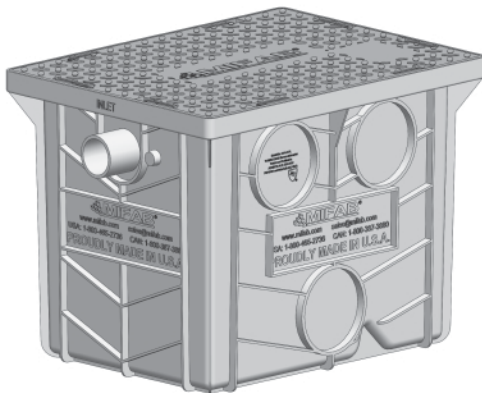

FEATURES AND ADVANTAGES

- **Lightweight**
- **Weight Load Capacity** – 350 lbs
- **Lid** – Easy to remove with secured latches
- **Warranty** – Lifetime Warranty
- **Easy to Clean** – Non-Corrosive
- **Structural Integrity** – manufactured in the USA out of seamless, rotationally molded High Density Polyethylene
- **Applications** – grease, oil, solids, plaster, lint, sand, fish scale and rice.



www.mifab.com

sales@mifab.com | Toll Free 1-800-465-2736 | Toll Free Canada 1-800-387-3880