


Location: \_\_\_\_\_



**T100-PGA-HPP-GRY**

## Polypropylene Longitudinal Slotted Grate to suit 4" clear opening channels

**Specification:** T100-PGA-HPP-GRY polypropylene longitudinal slotted grates are independently certified to meet Load Class A tested in accordance with EN1433 (3,372 lbs. {15 kN}). The grate length is 19.69" (.50 meter). The grate utilizes the patented "Clipfix" grate locking mechanism. The system (combined grate and channel) provides longitudinal shift protection.

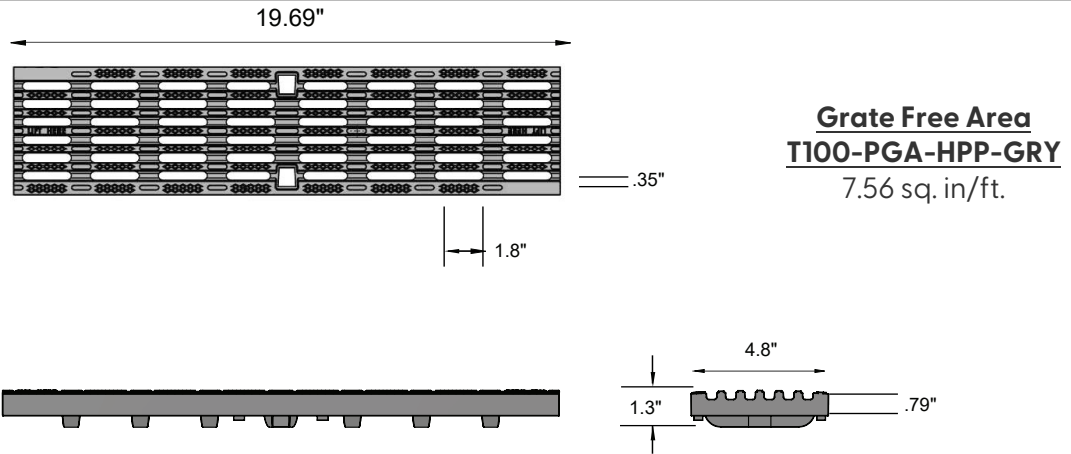

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH
T100-PGA-HPP-GRY	19.69" (500 mm)

### LOAD CLASS A

### Compliance



EN 1433 -  
3,372 LBS., 15kN,  
70 PSI



ADA



HEELPROOF



CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_