


Location: _____



Stainless Steel Mesh Grate to suit 4" clear opening channels



Specification: T100-PGC-3-SM stainless steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (.50 m) grates are also available in Load Class C (Part # T100-PGC-3-SM-500).

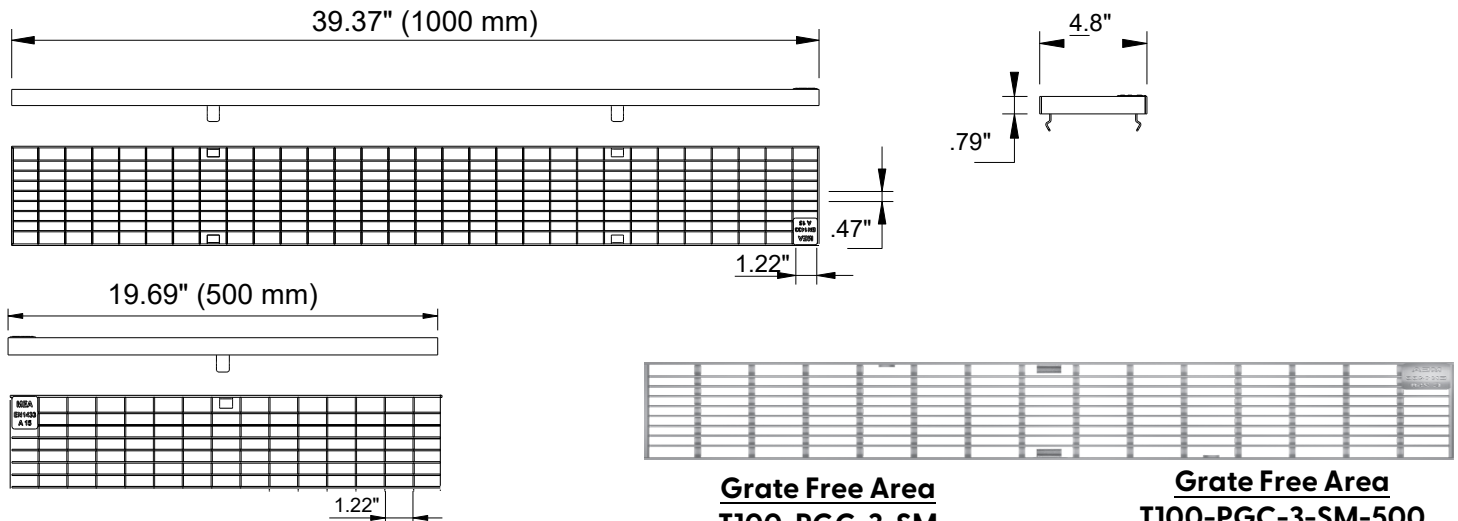

Grate Free Area
T100-PGC-3-SM

857 cm²/m
132.87 sq. in./meter

Grate Free Area
T100-PGC-3-SM-500

428.5 cm²/m
66.44 sq. in./meter



CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C Compliance



EN 1433 -
56,200 LBS., 250kN,
1160 PSI



ADA

GRATE MODEL NUMBER	LENGTH
T100-PGC-3-SM	39.37" (1000 mm)
T100-PGC-3-SM-500	19.69" (500 mm)

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

Revision Date: 2023-02-03

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880