


Location: _____



T100-PGC-4

Ductile Iron Slotted Grate
to suit 4" clear opening channels

Specification: T100-PGC-4 ductile iron slotted grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. The grate has a free area of 54.26 in²/linear ft.

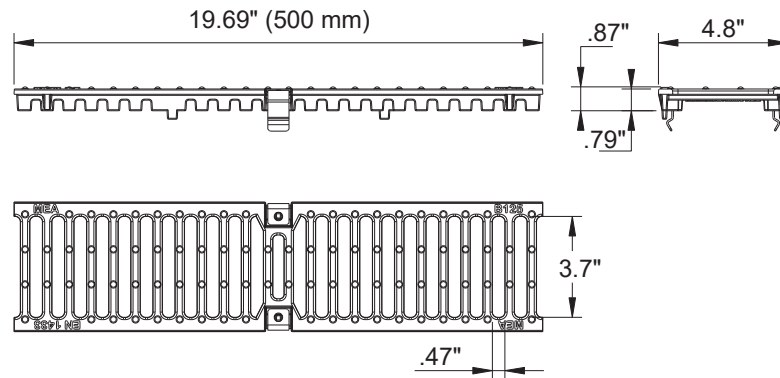

Grate Free Area
T100-PGC-4
16.64 Sq. in./ft.

CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.



GRATE MODEL NUMBER

LENGTH

T100-PGC-4

19.69" (500 mm)

-11B Black acid resistant epoxy coat

Black acid resistant epoxy coated ductile iron grates are available. Same price as the -13 grates.

LOAD CLASS C



EN 1433 -
56,200 LBS., 250kN,
1160 PSI

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____