



Location: \_\_\_\_\_



**T100-PGE-3-FS**

**Stainless Steel Slotted Grate  
to suit 4" clear opening channels**

**Specification:** T100-PGE-3-FS stainless steel slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 (134,800 lbs. (600kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (.50 m) grates are also available in Load Class E (Part # T100-PGE-3-FS-500).

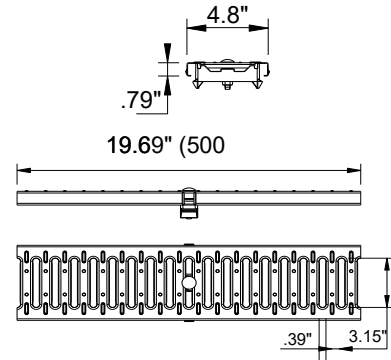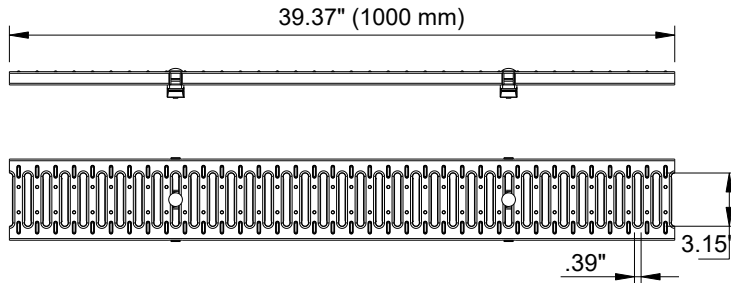

**Grate Free Area**  
**T100-PGE-3-FS**  
13.31 Sq. in./ft.


**Grate Free Area**  
**T100-PGE-3-FS-500**  
13.31 Sq. in./ft.

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.



GRATE MODEL NUMBER	LENGTH
T100-PGE-3-FS	39.37" (1000 mm)
T100-PGE-3-FS-500	19.69" (500 mm)

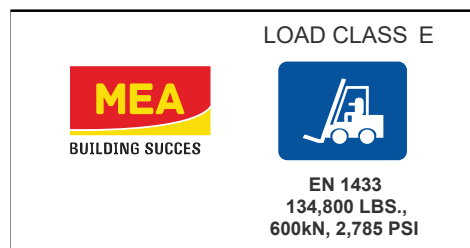

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_  
Section No: \_\_\_\_\_  
Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
Contractor: \_\_\_\_\_  
Purchase Order No: \_\_\_\_\_