

Location: \_\_\_\_\_






**T100-PGE-4-ADA-13-ARRA**

GALVANIZED DUCTILE IRON LONGITUDINAL  
SLOTTED GRATE TO SUIT 4" CLEAR OPENING  
CHANNELS, MADE IN USA

**Specification:** T100-PGE-4-ADA-13-ARRA galvanized ductile iron longitudinal slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. This grate is manufactured in the USA.



Grate Free Area T100-PGE-4-ADA-13-ARRA 18.07 Sq. in./ft.

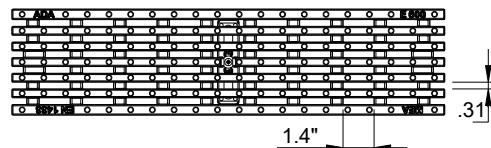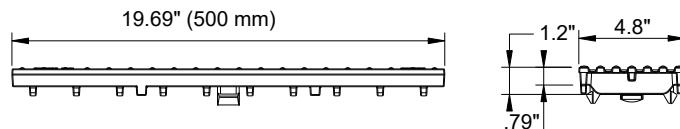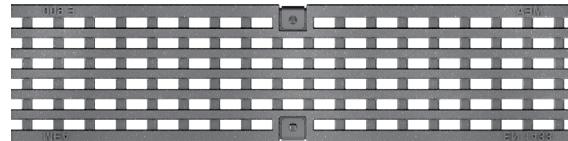

#### CLIPFIX ADVANTAGE:

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH
<b>T100-PGE-4-ADA-13-ARRA</b>	19.69" (500 mm)



#### LOAD CLASS E

EN 1433 134,800 LBS.,  
600kN, 2,785 PSI

ADA



#### COMPLIANCE



HEELPROOF

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_