

Location: _____





T200-PGE-4-ADA-13-ARRA

GALVANIZED DUCTILE IRON LONGITUDINAL
SLOTTED GRATE TO SUIT 8" CLEAR OPENING
CHANNELS, MADE IN USA

Specification: T200-PGE-4-ADA-13-ARRA Galvanized ductile iron longitudinal slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. This grate is manufactured in the USA.



Grate Free Area T200-PGE-4-ADA-13-ARRA 26.72 Sq. in./ft.

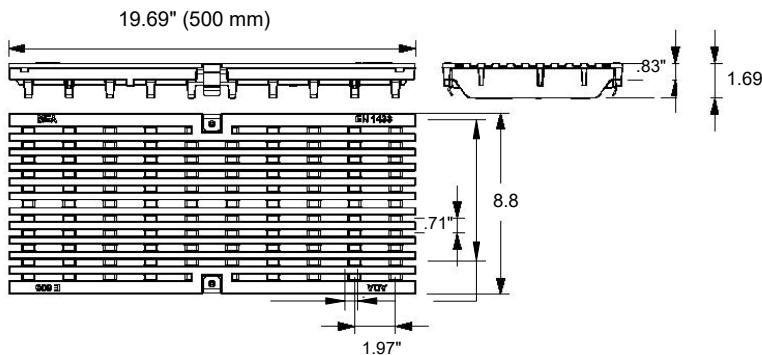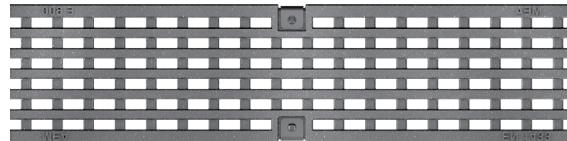

CLIPFIX ADVANTAGE:

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH
T200-PGE-4-ADA-13-ARRA	19.69" (500 mm)



LOAD CLASS E

EN 1433 134,800 LBS.,
600kN, 2,785 PSI

ADA



COMPLIANCE

HEELPROOF

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____