


Location: _____




T200-PGE-4-ADA

**Ductile Iron Longitudinal Slotted Grate to suit
8" clear opening channels**

Specification: T200-PGE-4-ADA ductile iron longitudinal slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

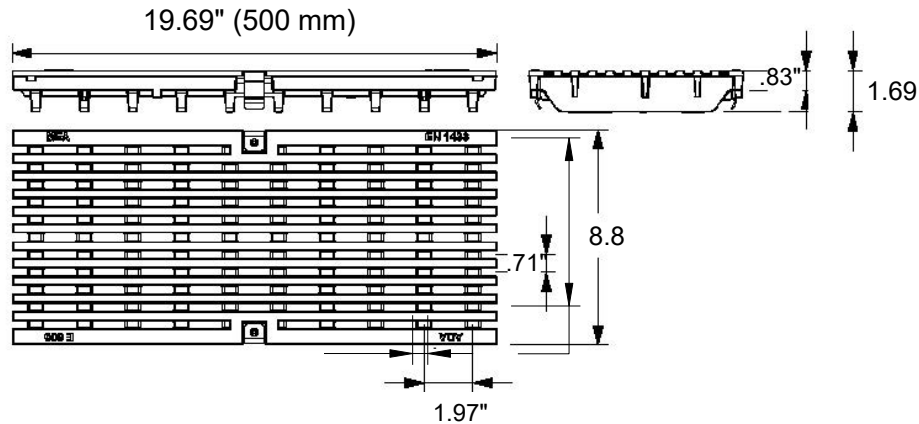



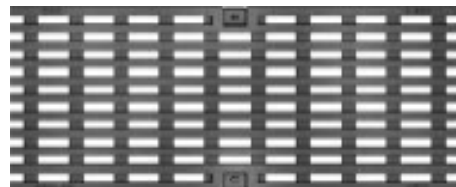

Grate Free Area
T200-PGE-4-ADA
26.72 Sq. in./ft.



CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH
T200-PGE-4-ADA	19.69" (500 mm)

LOAD CLASS E		Compliance	
			
EN 1433 - 134,800 LBS., 600kN, 2,785 PSI		ADA	HEELPROOF

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____