


Location: _____



T300-PGC-4

**Ductile Iron Slotted Grate
to suit 12" clear opening channels**

Specification: T300-PGC-4 ductile iron slotted grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

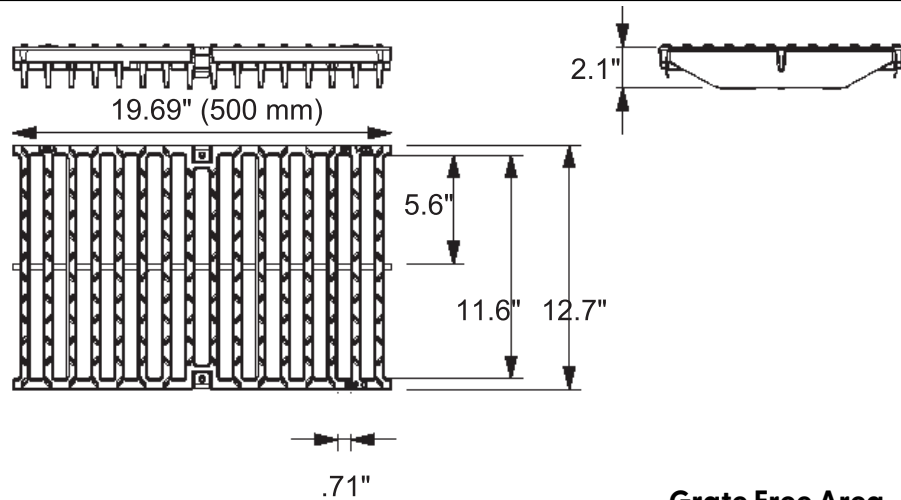

Grate Free Area
T300-PGC-4
77.02 Sq. in./ft.



CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH
T300-PGC-4	19.69" (500 mm)

LOAD CLASS



EN 1433 -
56,200 LBS.,
250kN, 1160 PSI

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____