


## T300

## 3 3/4" INTERNAL WIDTH, 2 7/8" DEEP POLYPROPYLENE TRENCH DRAIN SYSTEM

**Specification:** MIFAB\* Series T300, 3 3/4" internal width, 2 7/8" deep, 39.40" long, non sloped trench drain system. Body is manufactured from polypropylene. Each body has tabs on both sides of the body, for rebar tie down and leveling. Bodies have interlocking ends and a radiused bottom. End and bottom outlets are available in 2" no hub connections. 20" long polypropylene grates are provided as standard (Suffix –HPP) along with grate lockdown hardware for each grate to secure to the body. Load Class A and B grates are available.

**Function:** Used around pool, residential, multi family, kitchen and sidewalk areas for pedestrian load applications only. Ideal for shallow excavations as channel is only 2 7/8" deep. The lightweight and chemical resistant polypropylene body provides for long life. An infinite number of body sections can be assembled together to serve any requirement.

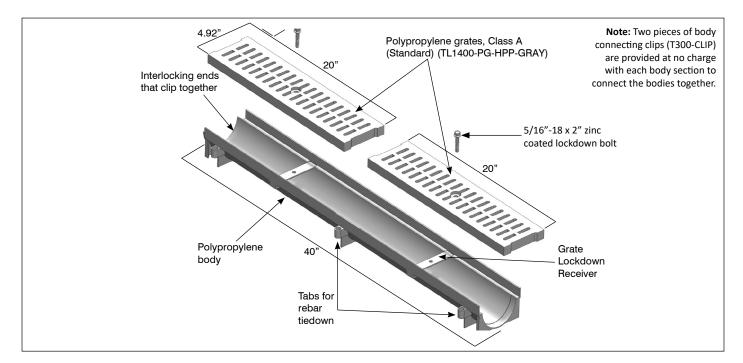

Suffix		Description	
	-BA	Buy American Act compliant product	
	-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)	
	-PA	Pennsylvania Steel Act compliant product	
	End caps / Outlets / Accessories		
	-PEC	Closed end cap	
	-PE2	2" no hub end outlet	
	-РВО	2" no hub bottom outlet	
	-PBDS	Bottom dome strainer	
	Standard	Connecting Clips (to connect bodies together)	
	Standard	5/16-18 x 2" Zinc Coated Bolts (2 per package) - for grate lockdown	
	-SSB	5/16-18 x 2" Stainless Steel Bolts (2 per package) - for grate lockdown	
	-PGLVP	2" long vandal resistant grate lockdown hardware 2 per body section - 1 for each grate	
	Grates		
	-SSDA	Stainless Steel, Decorative grate - Class A, 40" long	
	-FSGA Galvanized Steel, Fabricated Slotted grate - Class A, 40" long		
	-FS	Stainless Steel, Fabricated Slotted grate - Class A, 40" long	

-HPSS	Stainless Steel, Fabricated Perforated ADA grate - Class A, 40" long			
-HPP-GRAY Polypropylene, Heel Proof Slotted grate - Class A, 20" long (grate is color) (Standard with channels)				
-PGC	Ductile Iron, Slotted grate - Class B, 20" long			
-PGG Galvanized Steel, Fabricated Perforated ADA grate - Class A, 40" los				
Fabrications				
-TEE	Polypropylene tee			
-PB-45	45 Degree Body Section			
-PB-90	90 Degree Body Section			
-45	45 Degree Polypropylene, Heel Proof Slotted grate - Class A			
-90	-90 90 Degree Polypropylene, Heel Proof Slotted grate - Class A			
-CF	Cross Fabrication			
-SOF	Side Outlet Fabrication			
-SVF	Stainless Steel Veneer Frame			

CALIFORNIA PROPOSITION 65 WARNING. This pro-	duct contains chemicals known to the State	of California to cause cancer and birth defer	cts or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880