


TSS

TOP SET SQUARE HEELPROOF STRAINER

Specification: MIFAB® Series TSS(*)-(**) (*specify strainer size, ** specify strainer material) MIFAB Top Set heelproof strainer that can be adjusted vertically and side to side after the pour with a ½" thick composite strainer protective cover and indicating whisker. Complete with securing and adjustable hardware and allen key vandal resistant stainless steel grate screws.

Function: Used in showers, kitchens, restrooms, and other non-membrane finished areas. Square adjustable heelproof strainer is used with floors that are tiled or have straight line patterns. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and the three Phillips head screws underneath the grate can be engaged to raise the strainer vertically and to also adjust it side to side

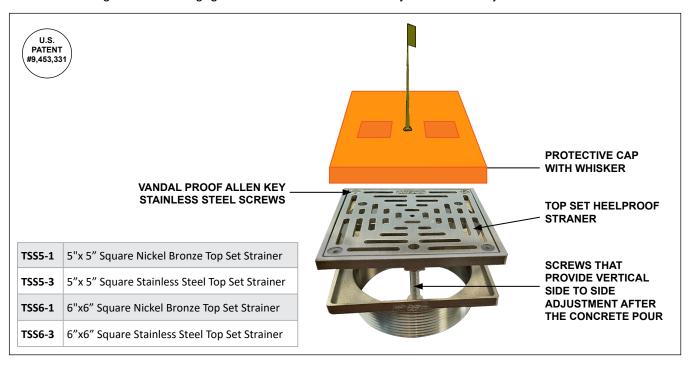

STRAINER SIZE	FREE AREA	ANSI / ASME RATING LOAD RATING Lbs.		WT. Lbs.	STRAINER ADJUSTMENT	
		N.B. (-1)	S.S. (-3)		MIN	MAX
5" x 5" (127)	9 in² (5200²)	Up to 2,000	5,000 to 7,499	2.00	1/2" (13)	2 9/16" (65)
6" x 6" (152)	21 in² (7700²)	Up to 2,000	5,000 to 7,499	3.00	11/16" (17)	2 9/16" (65)

SUFFIX	OPTIONAL VARIATIONS		
-1	Nickel Bronze		
-3	Stainless Steel (Type 304)		
-6	Security Screws (TR25 Torx and pin - H-1039A)		
-49	Polished Chrome		

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880