

Location: \_\_\_\_\_




**Z**

**ROUND STRAINER WITH ELASTOMERIC FLANGE**

**Specification:** MIFAB® Z strainer with 1/8" recessed, 13" diameter elastomeric flange, with standard reinforced 5" diameter strainer in either light duty nickel bronze (under 2,000 lbs.) or in heavy duty Type 304 stainless steel (5,000 - 7,499 lbs.). Furnished standard with vandal resistant allen key screws.

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas. Four inch wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate. Strainer has a 4" N.P.S.M. thread to work with any of MIFAB's floor drain bodies.

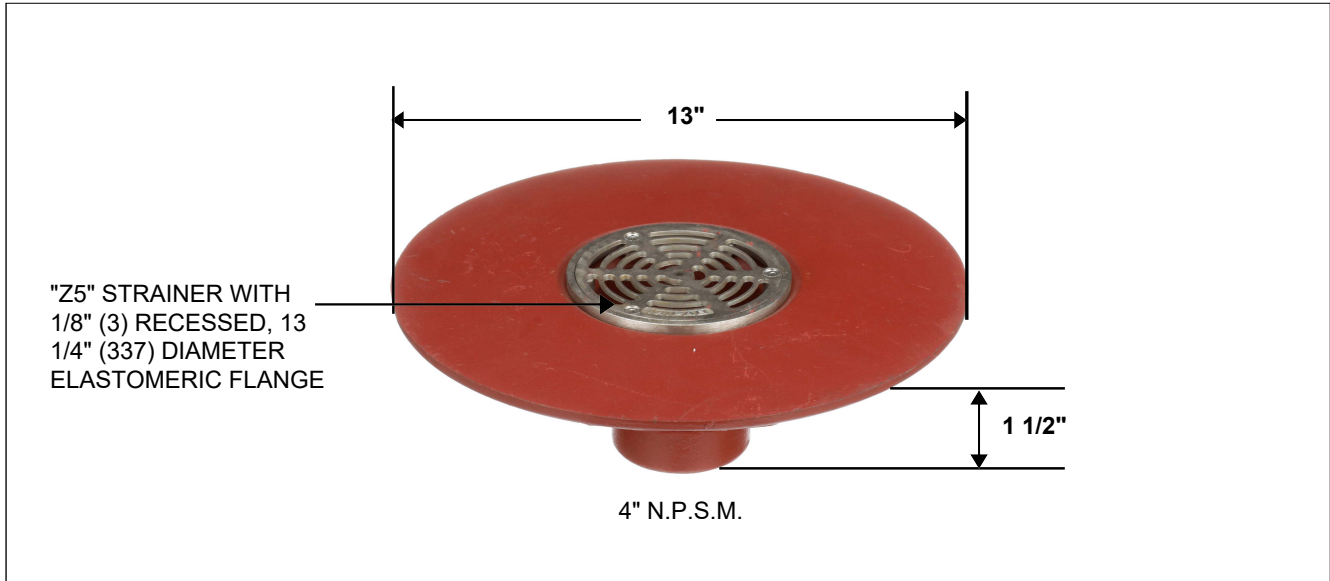

PART NO.	FREE AREA	DESCRIPTION	WT. LBS.	STRAINER ADJUSTMENT	
				MIN.	MAX
Z5	8 IN. SQ.	5" DIAMETER	6.50"	1/2"	1 1/2"

SUFFIX	OPTIONAL VARIATIONS
-1	Nickel Bronze
-3	Stainless Steel
-6	Security Screws (TR25 Torx and pin - H-1039A)
-49	Polished Chrome

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_