

Location: _____



HBVB

HOSE CONNECTION VACUUM BREAKER -LL

Specification: Designed for installation on potable water lines such as service sinks, laundry tubs and hose bibbs to protect against back-siphonage of polluted water into the potable water supply. Assembly shall provide protection where a potential health hazard does not exist.

Function: A Hose Connection Vacuum Breaker is designed to prevent the back-siphonage of contaminated water. This device is designed to meet ASSE 1011 and CSA B 64.2 and is IAPMO listed. This device is not to be used under continuous pressure or where there is a possibility of a back pressure condition.


Features: Furnished with a break away set screw to provide a tamper resistant installation. Allows sill cock to be easily drained. Manufactured in both a rough brass and a chrome plated option.

Ratings:


- Maximum Pressure: 125 psi (8.6 bar).
- Maximum Temperature: 180° F (82° C).
- Inlet Connection: 3/4" (20 MM) standard female hose thread.
- Outlet Connection: 3/4" (20 MM) standard male hose thread.



In both Rough Brass and Chrome Plated models.

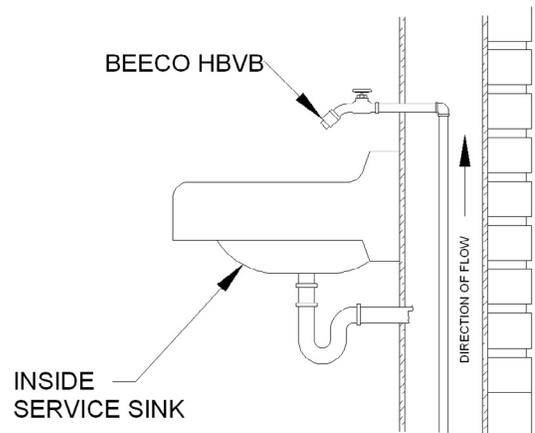

| Model No. | Size | Finish |
|----------------------|------|---------------|
| HVB.75F-X-.75M-RB-LL | 3/4" | Rough Brass |
| HVB.75F-X-.75M-CP-LL | 3/4" | Chrome Plated |

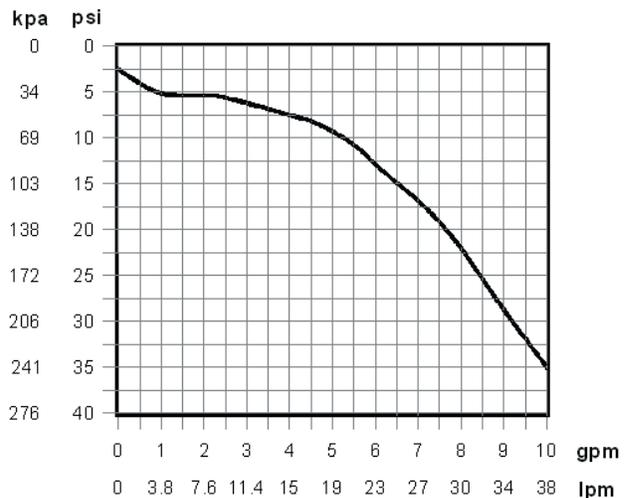

Approvals



CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____