

Location: _____




MI-FISH

FISH SCALE INTERCEPTOR

Specification: MIFAB® Series MI-FISH sanitary powder epoxy coated inside and outside fabricated 10 gauge steel fish scale interceptor. Unit shall include: Sediment bucket with perforated baffle near inlet (3/8" (9) holes), primary removable straining baffle (1/2" (13) thick with 1/4" (6) holes), secondary removable straining baffle (1/2" (13) thick with 1/8" (3) holes), securing bolt(s), removable cross bar, stainless steel calibrated orifice plate and steel powder epoxy coated non skid rectangular gasketed lid(s).

Function: Used in commercial fish processing facilities to receive wastewater with fish scales and sediment through the side inlet. Primary and secondary straining removable baffles are designed to capture debris and prevent drain line clogging. Electrostatically applied powder epoxy coating ensures extra long life.

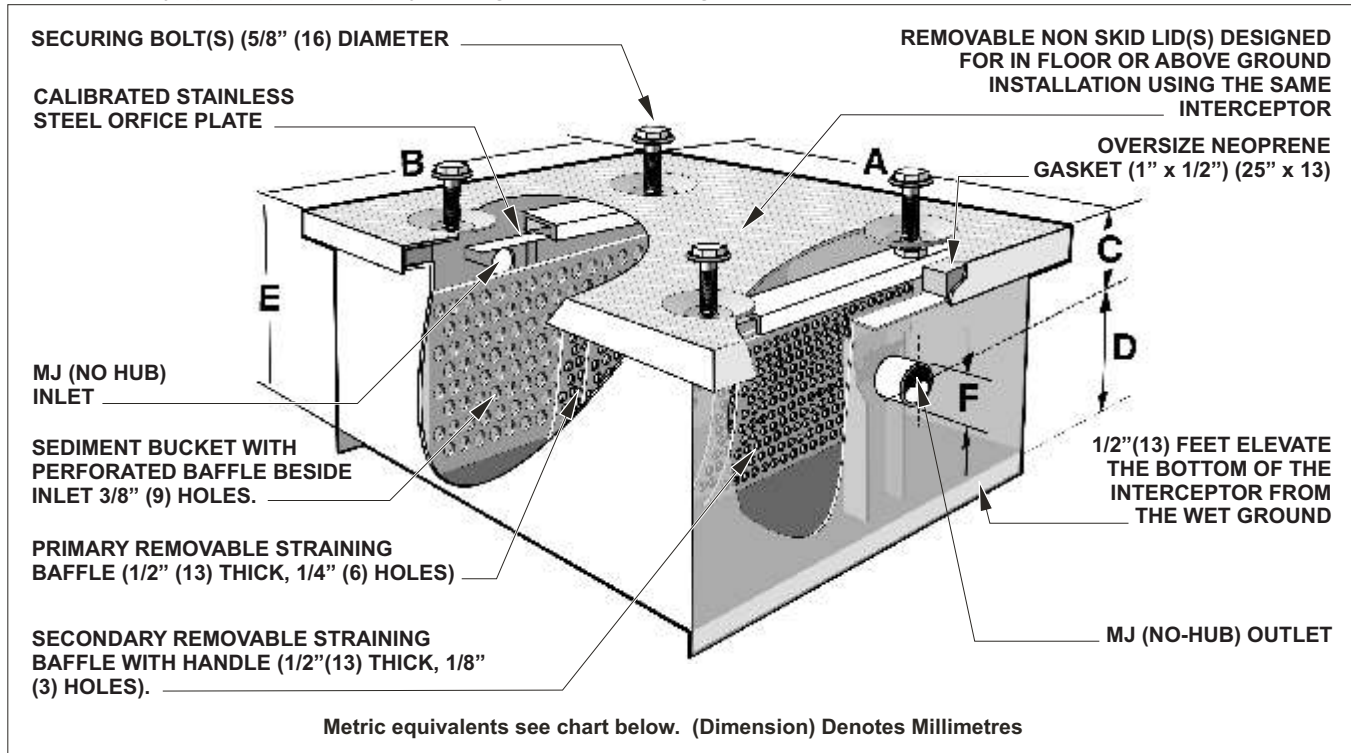

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

MODEL NO.	US GPM	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	LIQUID HOLDING CAP. (U.S.G)
MI-FISH-1	34	29.5" (750)	20" (508)	3" (76)	17" (432)	20" (508)	2" (51)	1	4	34.29
MI-FISH-2	40	29.5" (750)	20.5" (520)	4" (102)	20" (508)	24" (610)	3" (76)	1	4	40.74
MI-FISH-3	80	33.5" (850)	26" (660)	4" (102)	26" (660)	30" (762)	3" (76)	2	4	80.18
MI-FISH-4	111	37.5" (952)	30" (762)	4" (102)	28" (711)	32" (813)	3" (76)	2	8	114.03
MI-FISH-5	155	55.5" (1 409)	26" (660)	6" (152)	30" (762)	36" (914)	4" (102)	2	8	155.64
MI-FISH-6	213	67.5" (1714)	28" (711)	8" (203)	32" (813)	40" (1016)	6" (152)	3	12	213.80
MI-FISH-7	302	67.5" (1 714)	28" (711)	10" (254)	44" (1118)	54" (1372)	6" (152)	3	12	302.21
MI-FISH-8	405	67.5" (1714)	30" (762)	12" (305)	54" (1372)	66" (1676)	6" (152)	3	12	404.91
MI-FISH-9	506	67.5" (1714)	40" (1016)	10" (254)	50" (1270)	60" (1524)	6" (152)	3	12	506.42
MI-FISH-10	750	91.5" (2324)	40" (1016)	8" (203)	54" (1372)	62" (1575)	6" (152)	4	16	868.60
MIFISH-11	1017	98" (2489)	50" (1270)	12" (305)	54" (1372)	66" (1676)	6" (152)	4	16	1018.39
MI-FISH-12	1536	98" (2489)	50" (1270)	12" (305)	80" (2032)	92" (2337)	6" (152)	4	16	1536.90

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-AL	Aluminum lid(s)	-FLM	Anchor flange and membrane clamp
-AP	Anode pack	-HD	Heavy Duty load rated lids
-BA	Buy American Act compliant product	-HLA	High level alarm
-C	Extension "C" as required	-RSSB	Replacement stainless steel baffle
-FL	Anchor flange		
-FLC	Flow control fitting		
			-SS Stainless steel interceptor
			-T F.I.P female threaded inlet and outlet
			-TL Lid(s) to receive tile or terrazzo
			specify Special size inlet and outlet

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880