

Location: \_\_\_\_\_




# MI-RICE

## RICE INTERCEPTOR

**Specification:** MIFAB® Series MI-RICE sanitary powder epoxy coated inside and outside fabricated 10 gauge steel rice interceptor with flow rate of \_\_\_\_\_ (indicate). Unit shall include: 1/2" (13) thick fixed primary straining baffle with 1/4" (6.4) holes and secondary 1/2" (13) thick removable straining baffle with 1/4" (6.4) holes, removable cross bar, securing bolt(s), stainless steel calibrated orifice plate, and steel powder epoxy coated non skid rectangular gasketed lid(s).

**Function:** Used in commercial kitchen facilities to receive wastewater with rice and sediment through the side inlet. Fixed primary straining and removable secondary straining baffle are designed to capture debris and prevent drain line clogging. Electrostatically applied powder epoxy coating ensures extra long life.

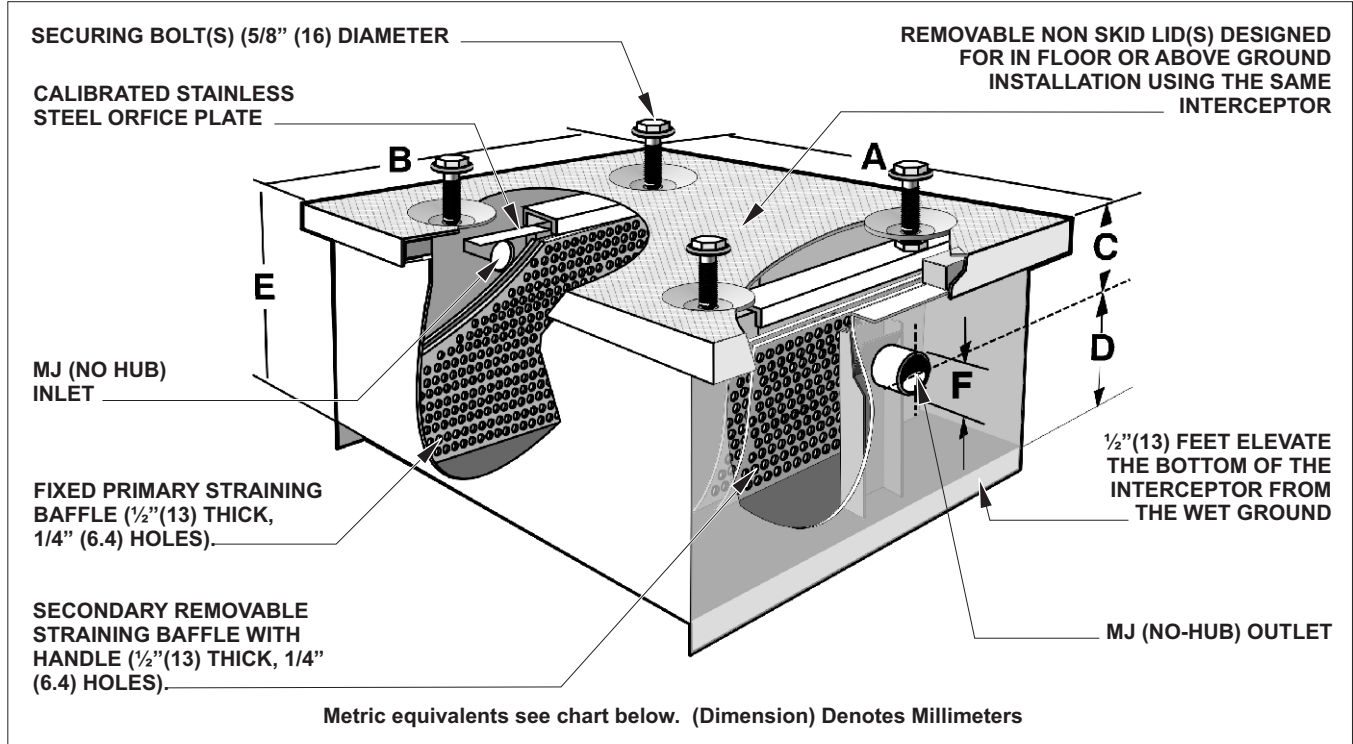

**Note:** The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

MODEL NO.	US GPM	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	LIQUID HOLDING CAP. (U.S.G.)
MI-RICE-1	50	29.5" (736)	20" (500)	3" (75)	17" (425)	20" (500)	2" (50)	1	4	34.29
MI-RICE-2	70	29.5" (737)	20.5" (513)	4" (100)	20" (500)	24" (600)	3" (75)	1	4	40.74
MI-RICE-3	100	33.5" (838)	26" (650)	4" (100)	26" (650)	30" (750)	3" (75)	2	4	80.18
MI-RICE-4	130	37.5" (938)	30" (750)	4" (100)	28" (700)	32" (800)	3" (75)	2	8	114.03
MI-RICE-5	150	55.5" (1388)	26" (650)	6" (150)	30" (750)	36" (900)	4" (100)	2	8	155.64
MI-RICE-6	200	67.5" (1688)	28" (700)	8" (200)	32" (800)	40" (1000)	6" (150)	3	12	213.80
MI-RICE-7	300	67.5" (1688)	28" (700)	10" (250)	44" (1100)	54" (1350)	6" (150)	3	12	302.26
MI-RICE-8	400	67.5" (1688)	30" (750)	12" (300)	54" (1350)	66" (1650)	6" (150)	3	12	404.91
MI-RICE-9	500	67.5" (1688)	40" (1000)	10" (250)	50" (1250)	60" (1500)	6" (150)	3	12	506.42
MI-RICE-10	700	91.5" (2288)	40" (1000)	8" (200)	54" (1350)	62" (1550)	6" (150)	4	16	868.65
MI-RICE-11	700	98" (2450)	50" (1250)	12" (300)	54" (1350)	66" (1650)	6" (150)	4	16	1017.35
MI-RICE-12	700	98" (2450)	50" (1250)	12" (300)	80" (2000)	92" (2300)	6" (150)	4	16	1536.00

- SUFFIX**
- AL Aluminum lid(s)
  - AP Anode pack
  - BA Minimum 51% material cost made in the USA
  - C Extension "C" as required
  - FL Anchor flange
  - FLC Flow control fitting

- SUFFIX**
- FLM Anchor flange and membrane clamp
  - HD Heavy Duty load rated lids
  - HLA High level alarm
  - RSSB Replacement stainless steel baffle

- SUFFIX**
- SB Sediment bucket
  - SS Stainless steel interceptor
  - T F.I.P. female threaded inlet and outlet
  - TL Lid(s) to receive tile or terrazzo
  - specify Special size inlet and outlet

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_

MIFAB reserves the right to make changes in material and design without formal notice and obligation.