

SUPER-1500

1. Inlet and Outlet No-Hub Connections.
2. Liquid Holding Capacity: 1500 Gallons
3. H2O Load Rated Access Covers
4. Maximum Operating Temperature: 190Å Continuous

DETAILS



- Certified by CSA and IAPMO to ASME A112.14.3, CSA B481, and ANSI Z1001
- Approved installation to ASME A112.14.3 Type C
- Factory installed internal piping.
- 3/8" thick seamless high density polyethylene.
- Full internal access through lids.
- Vent not required for proper operation.
- Designed for above or below ground installations.
- Integral Anti-siphon Air Relief port.

SUFFIX






- AK
- C
- DP
- EP
- F6
- HLA

OPTIONAL VARIATIONS

- High water anchor kit
- Lid extension(specify)
- Dosing pump
- Enzyme port
- 6" No Hub inlet/outlet connection
- High level alarm

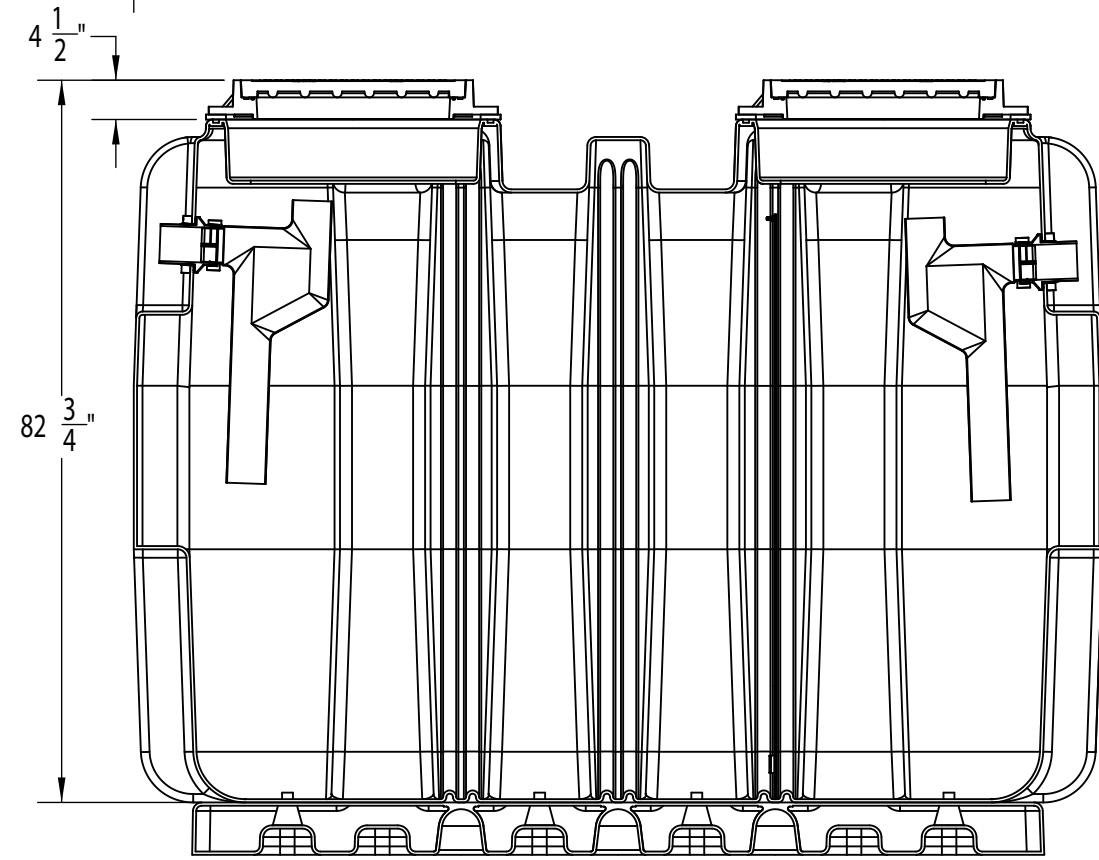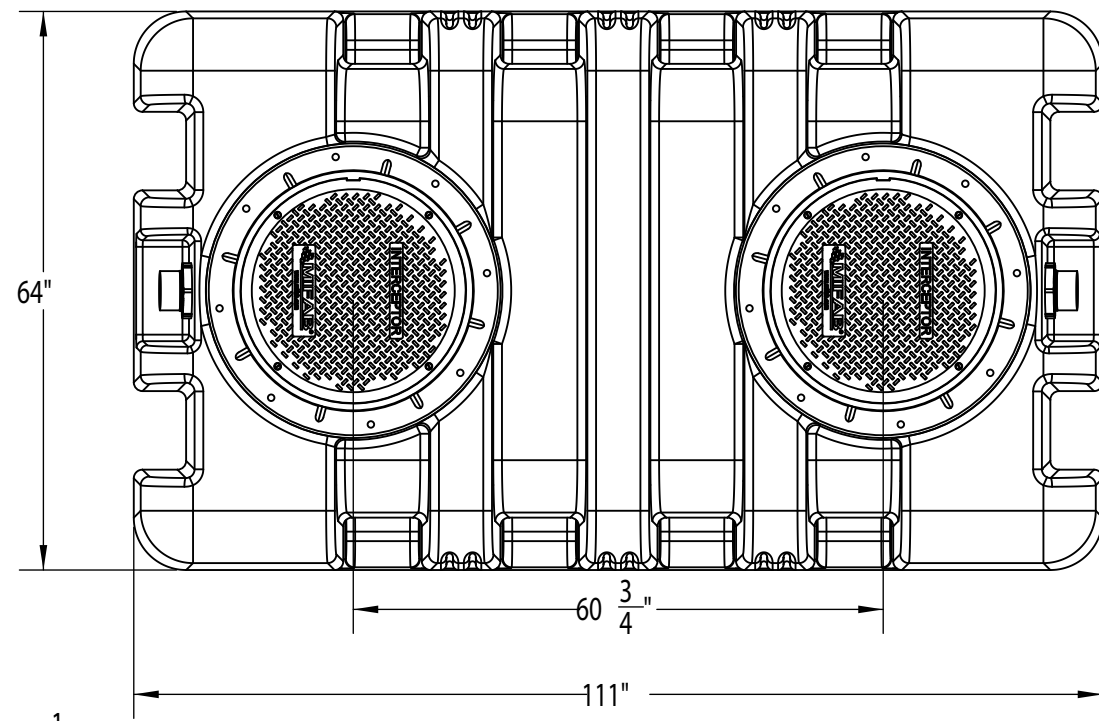

SHOWN WITH DIRECT CONNECT LID OPTION (-DCL)

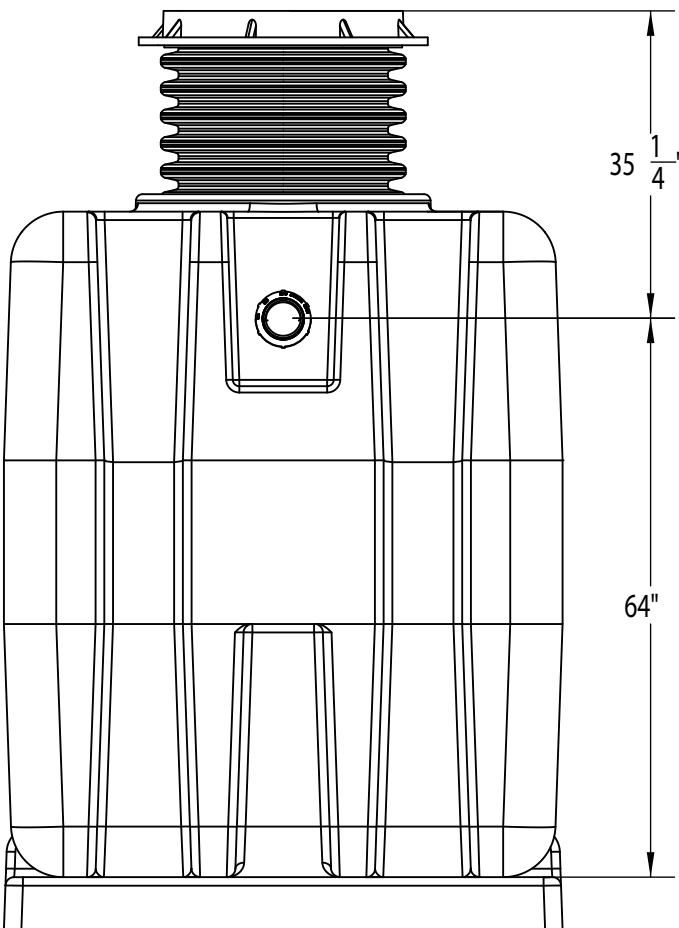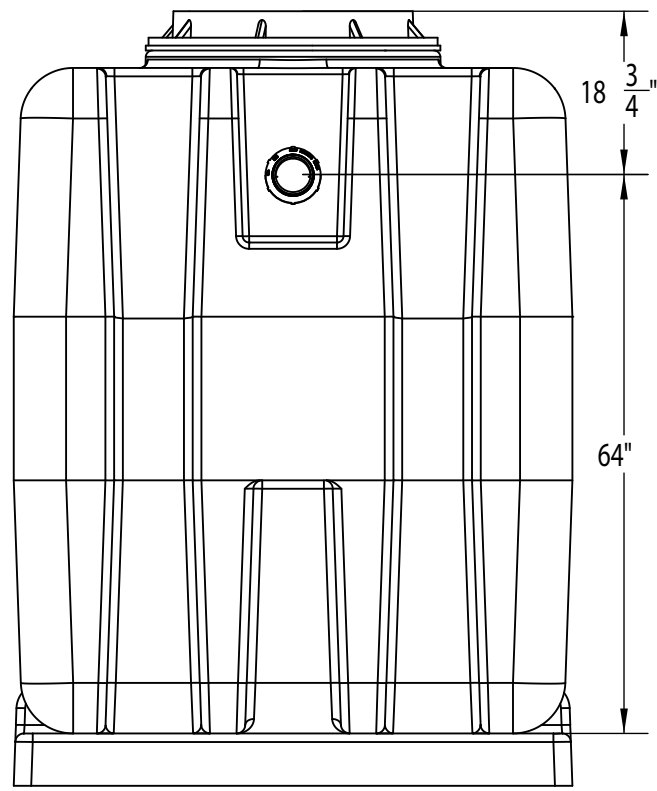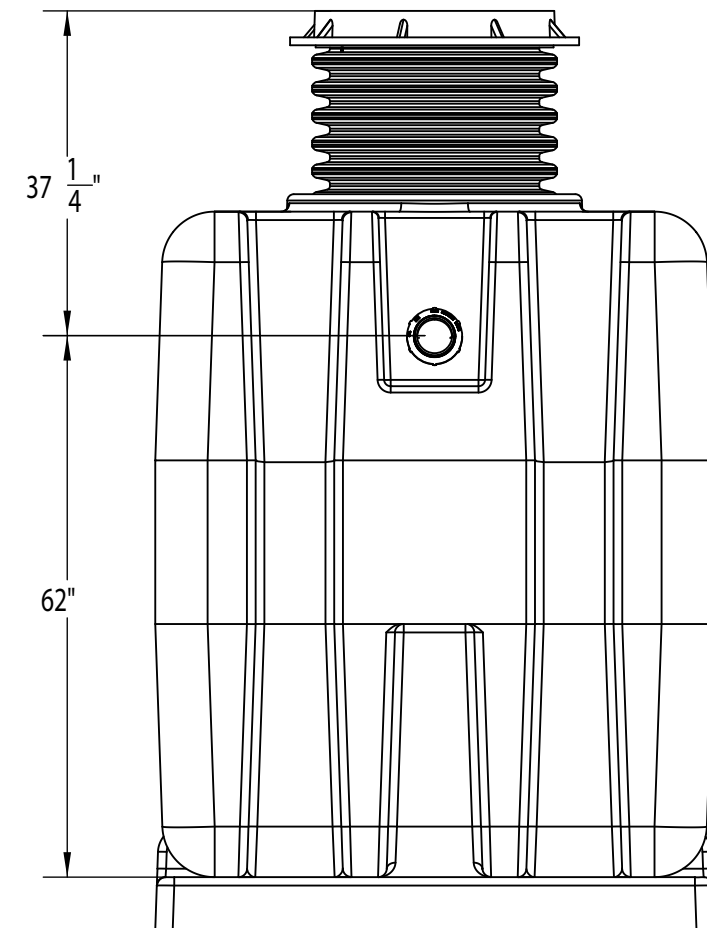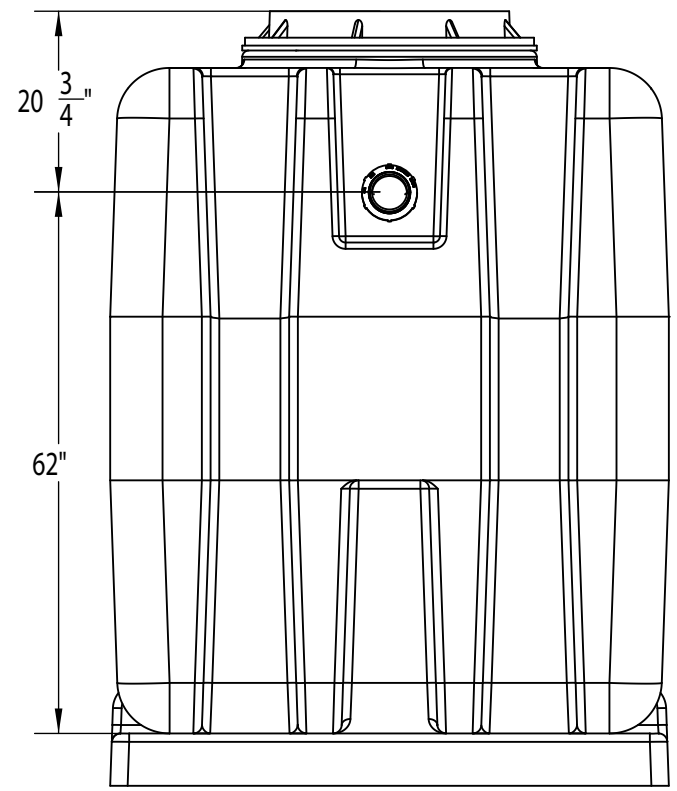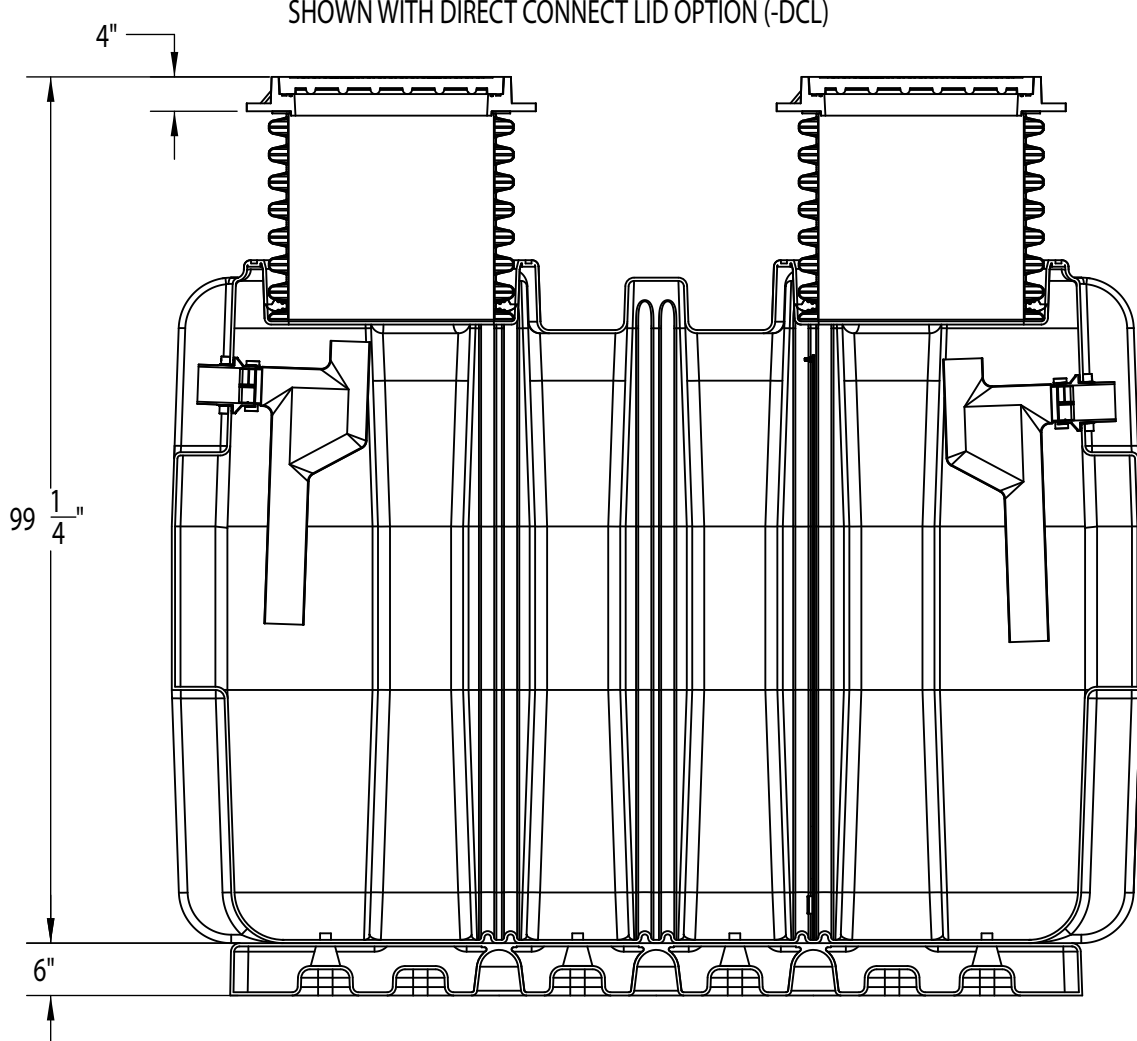

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MIFAB, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MIFAB, INC. IS
PROHIBITED.

LASER/SHEAR:	UNLESS OTHERWISE SPECIFIED:	NAME	DATE
BRAKE PRESS:	DIMENSIONS ARE IN INCHES	DRAWN	XX XX
WELDED BY:	TOLERANCES:	CHECKED	XX
CLEAN/PAINT:	FRACTIONAL: ± 1/16	ENG APPR.	
COMPLETED BY:	ANGULAR: MACH ± 1 Å BEND ± 1 Å	MFG APPR.	
REVIEWED BY:	TWO PLACE DECIMAL ± .015	Q.A.	
NEXT ASSY	THREE PLACE DECIMAL ± .010	QUANTITY:	
USED ON	TYPICAL DRAFT ANGLE 2 Å	SEE-BOM	
APPLICATION	MATERIAL DESCRIPTION	FINISH PART#	XX
	SEE-BOM		
	DO NOT SCALE DRAWING		



TITLE: 1500gallon LIQUID HOLD
CAP. GREASE INT.

SIZE	DWG. NO.	REV
C	SUPER-1500	
SCALE: 1:22	WEIGHT:	SHEET 1 OF 1