

SUPER-2000

- 1. Inlet and Outlet No-Hub Connections.
- 2. Liquid Holding Capacity: 2000 Gallons
- 3. H2O Load Rated Access Covers
- 4. Maximum Operating Temperature: 190Å Continuous

DETAILS





- Factory installed internal piping.
- 3/8" thick seamless high density polyethylene.
- Full internal access through lids.
- Vent not required for proper operation.
- Designed for above or below ground installations.
- Integral Anti-siphon Air Relief port.

SUFFIX




- | | |
|------|-----------------------------------|
| -AK | High water anchor kit |
| -C | Lid extension(specify) |
| -DP | Dosing pump |
| -EP | Enzyme port |
| -F6 | 6" No Hub inlet/outlet connection |
| -HLA | High level alarm |

OPTIONAL VARIATIONS

- (This section is merged into the SUFFIX table above for better readability)

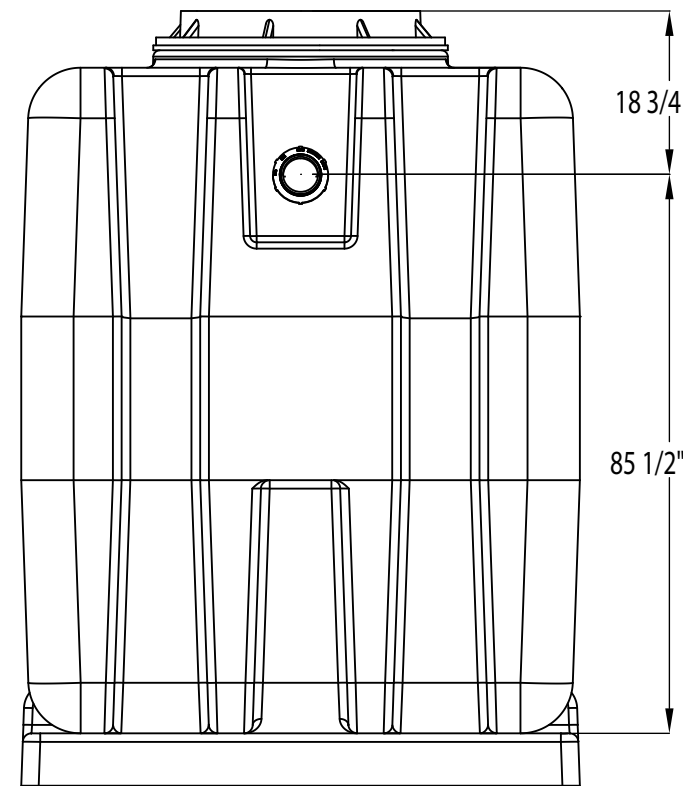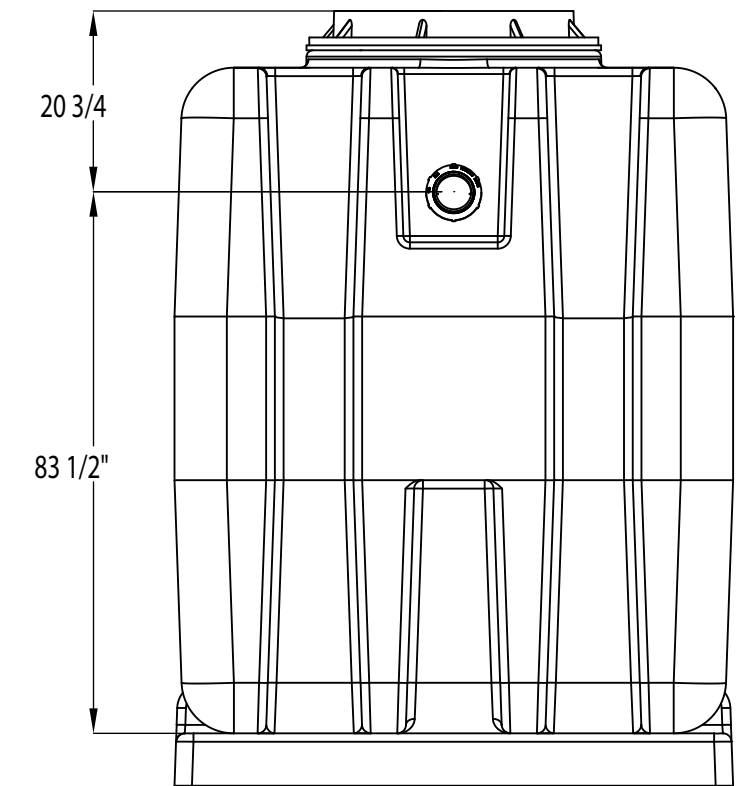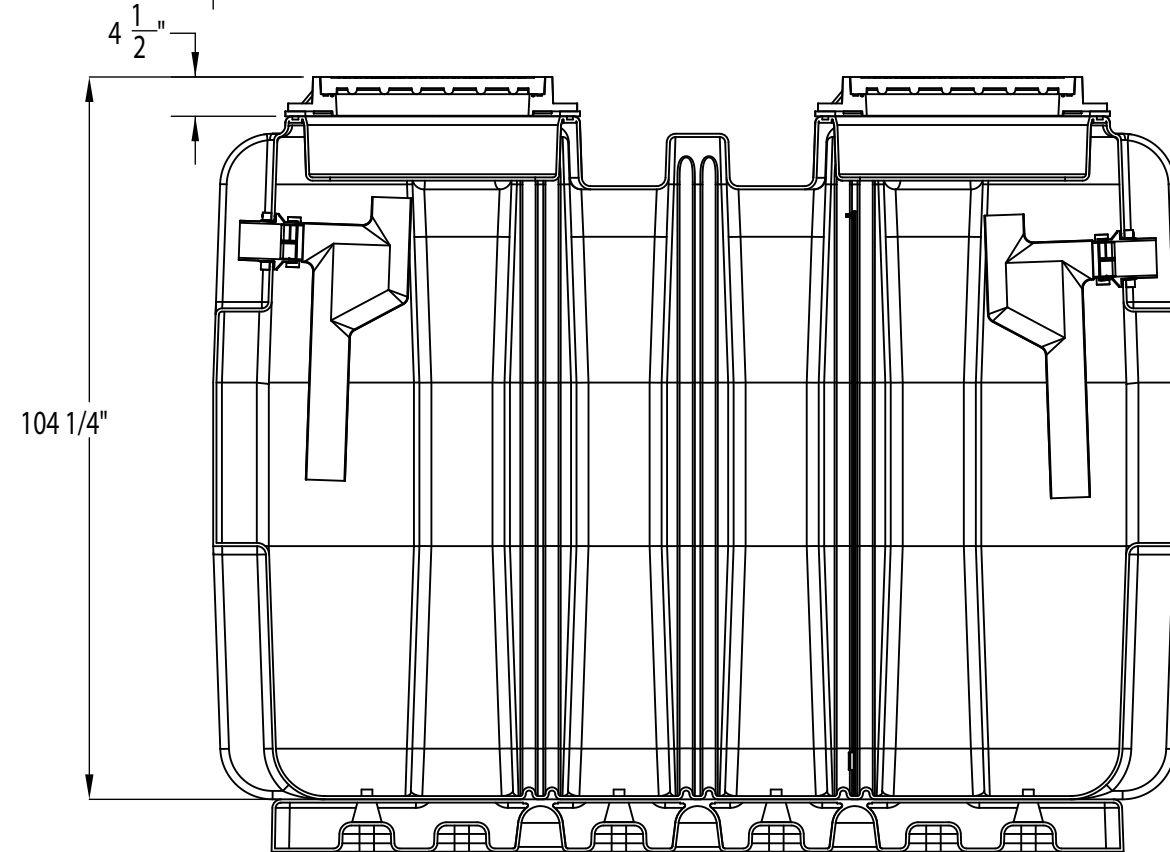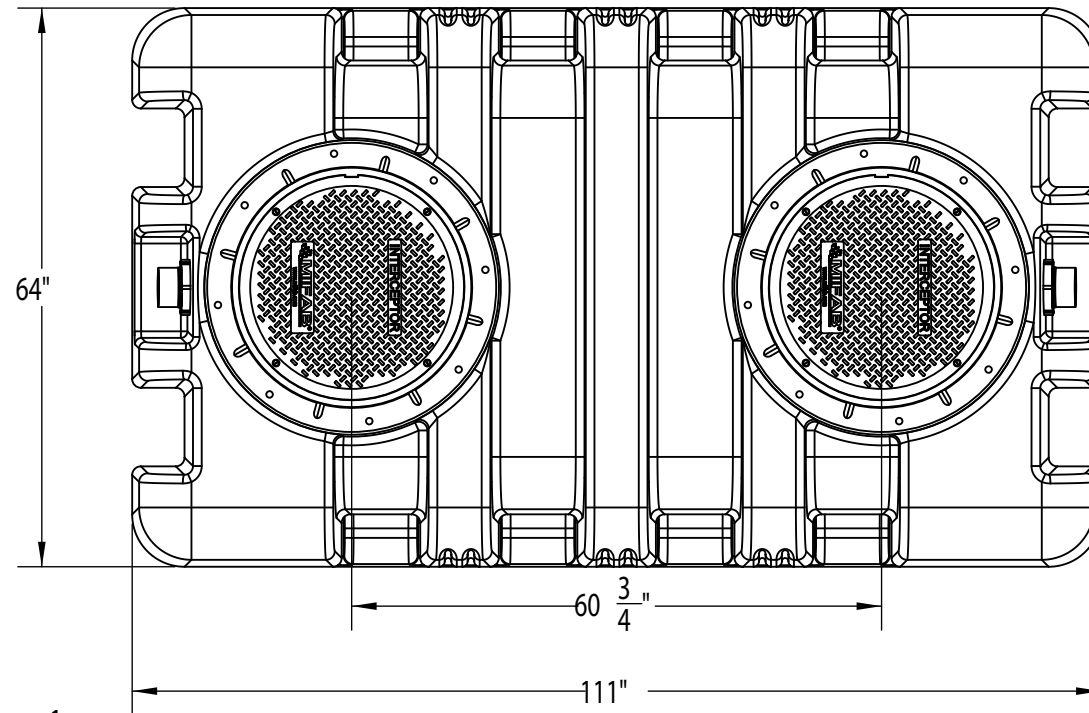

SHOWN WITH DIRECT CONNECT LID OPTION (-DCL)

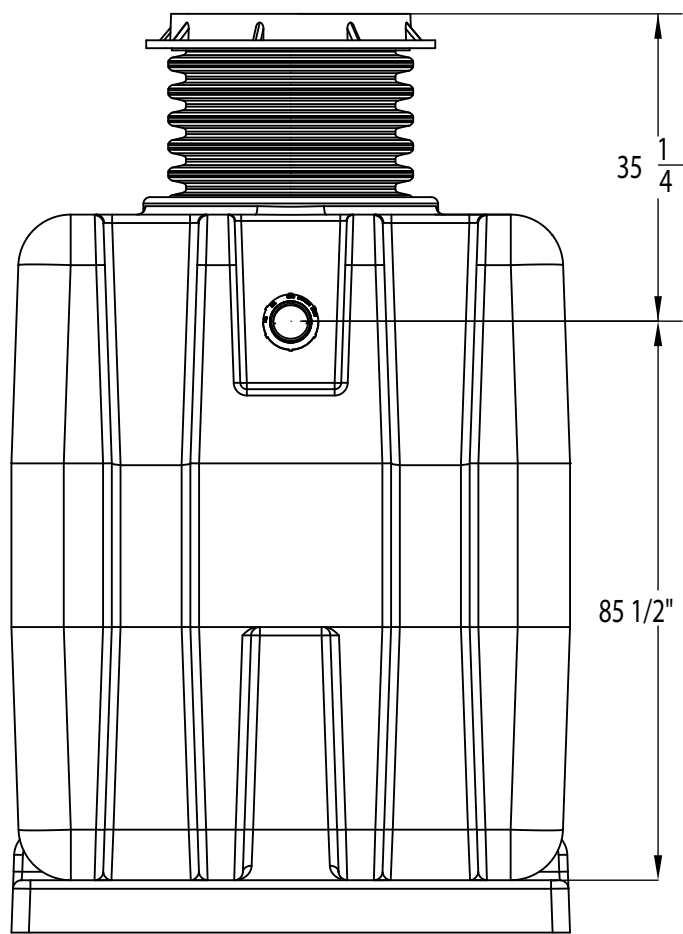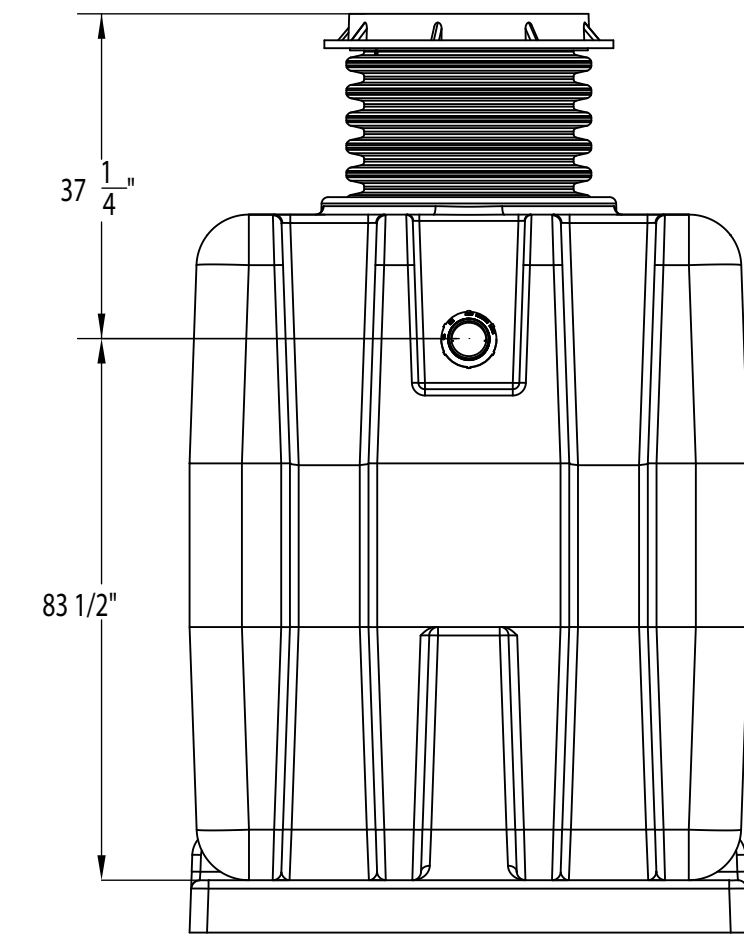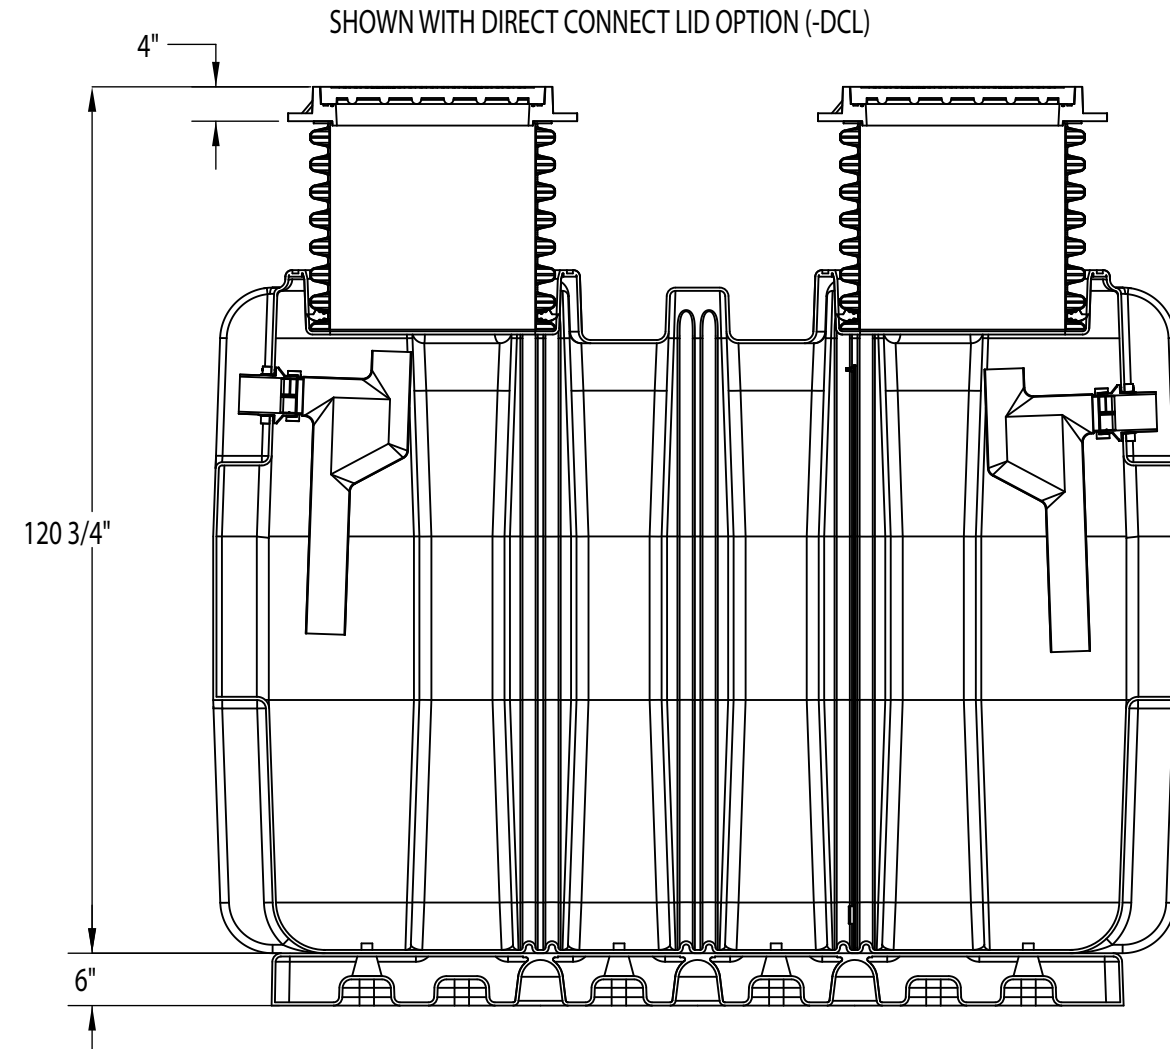

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MIFAB, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MIFAB, INC. IS
PROHIBITED.

LASER/SHEAR:	UNLESS OTHERWISE SPECIFIED:	NAME	DATE	
BRAKE PRESS:	DIMENSIONS ARE IN INCHES	DRAWN	XX	
WELDED BY:	TOLERANCES:	CHECKED	XX	
CLEAN/PAINT:	FRACTIONAL ± 1/16	ENG APPR.		
COMPLETED BY:	ANGULAR: MACH ± 1 A BEND ± 1 A	MFG APPR.		TITLE:
REVIEWED BY:	TWO PLACE DECIMAL ± .015	Q.A.		2000gallon LIQUID HOLD
NEXT ASSY	THREE PLACE DECIMAL ± .010	QUANTITY:		CAP. GREASE INT.
USED ON	TYPICAL DRAFT ANGLE 2 A	SEE-BOM		SIZE
APPLICATION	MATERIAL DESCRIPTION	SEE-BOM		C
	FINISH PART#	XX		DWG. NO.
	DO NOT SCALE DRAWING			SUPER-2000
				REV
				SCALE: 1:22
				WEIGHT:
				SHEET 1 OF 1