




SuperMax® Interceptors may be used in any number of different combinations to properly service the application.

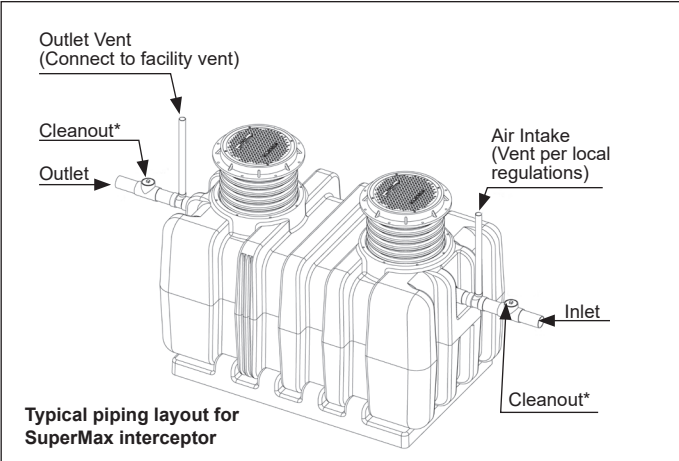


Typical piping layout for SuperMax interceptor

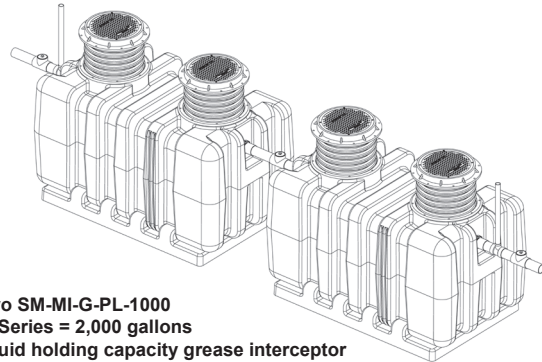


Two SM-MI-G-PL-1000 in Series = 2,000 gallons liquid holding capacity grease interceptor

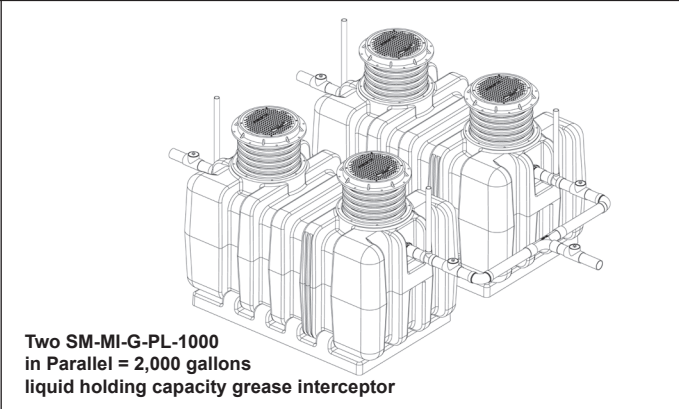


Two SM-MI-G-PL-1000 in Parallel = 2,000 gallons liquid holding capacity grease interceptor

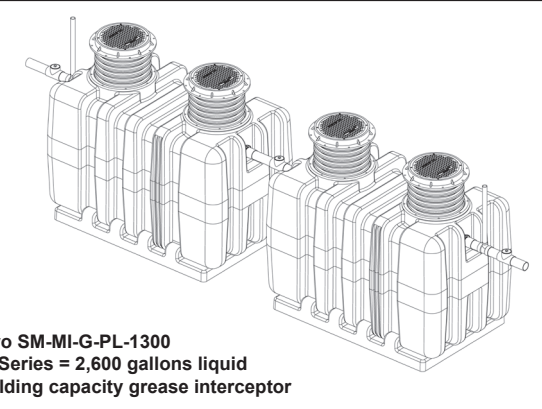


Two SM-MI-G-PL-1300 in Series = 2,600 gallons liquid holding capacity grease interceptor

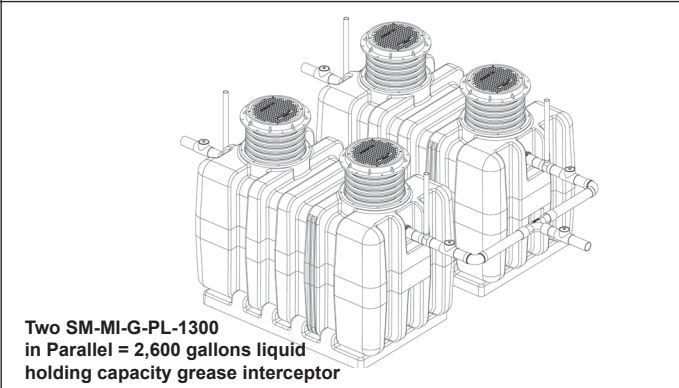

Two SM-MI-G-PL-1300 in Parallel = 2,600 gallons liquid holding capacity grease interceptor

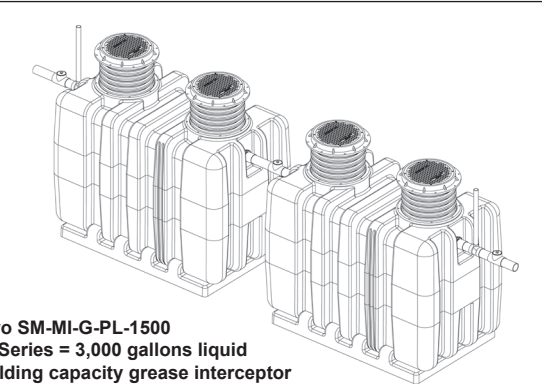

Two SM-MI-G-PL-1500 in Series = 3,000 gallons liquid holding capacity grease interceptor

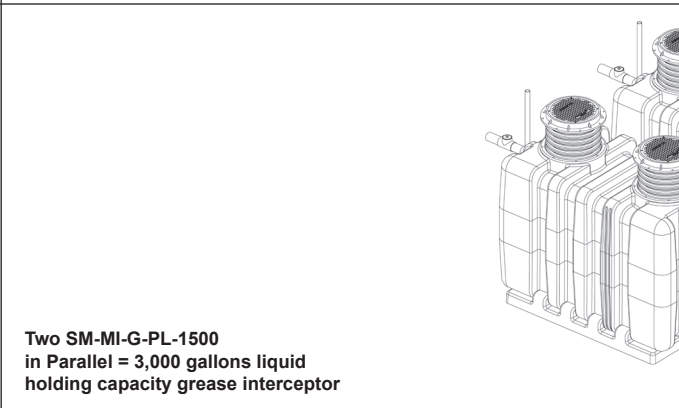

Two SM-MI-G-PL-1500 in Parallel = 3,000 gallons liquid holding capacity grease interceptor

*** Please see MIFAB® website for other combinations**