


21" DEEP, 12" WIDE, POLYPROPYLENE BODY SLOT DRAIN WITH 1-3/4" SLOT OPENINGS

Specification: MIFAB® Series T2000-SD-21H, 39.40" long, 21" deep, 9.7" internal body width, neutral sloped slot drain system. Body is manufactured from polypropylene. Each body has six tabs for #4 rebar tie down and leveling. Bodies have interlocking ends, a radiused bottom for efficient liquid drainage and have staggered, semi-circular cutouts on each side at the bottom to enable concrete flow underneath the body. Complete with a 1 3/4" wide slot opening top assembly that has spacer bars at 5" intervals to keep the sides of the slot apart. The slot opening top assembly is manufactured from 14 gauge steel and finished with an acid resistant powder epoxy coating. Specify -3 for a fabricated Type 304 stainless steel slot opening top assembly. Specify -HD for a fabricated heavy duty steel slot opening top assembly for dynamic loads. End and bottom outlets are available in 4" and 6" no hub outlet connections. Catch basins are also available.

Function: Used in parking lots, factories, highways, airports, ports, wineries and any other facilities that require surface drainage with a narrow drainage opening for aesthetic appeal. The lightweight and chemical resistant polypropylene body provides for long life. Water resistant sealant recommended between sections for indoor installations. An infinite number of body sections can be assembled together to serve any requirement. 45 and 90 degree body sections are available.

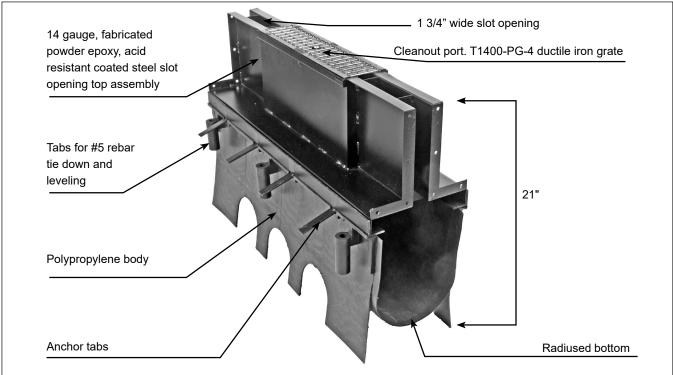

Note: Specify the total length of the SD-21H slot drain system required along with the number of outlets (specify bottom or end or both) and design of the trench drain system (straight run only or straight runs with corners and turns).

End caps / Outlets / Accessories		
Suffix	Description	
-BA	Buy American Act compliant product	
-PA	Pennsylvania Steel Act compliant product	
-PEC	Closed end cap	
-PEO	Combination 4" or 6" no hub end outlet	
-PBO	Combination 4" or 6" no hub bottom outlet	
-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)	
Frame Options		
Suffix	Description	
-3	Type 304 Stainless Steel Frame with 1 3/4" wide slot	
-13	Galvanized Steel Frame with 1 3/4" wide slot	
-HD	Heavy duty steel 1 3/4" wide slot opening top assembly for dynamic loads.	

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880