

Location: _____




F1100-C-TSS(*)

TOP SET® FINISHED FLOOR DRAIN WITH SQUARE HEEL PROOF STRAINER AND MEMBRANE CLAMP

Specification: MIFAB® Series F1100-C-TSS(*)-(**) (*specify strainer size and (**) finish) MIFAB® Top Set finished floor drain with lacquered cast iron body and waterproofing cast iron membrane clamp, securing and adjustable hardware, allen key vandal resistant stainless steel screws and square heelproof strainer (specify -1 for nickel bronze and -3 for stainless steel) that can be adjusted vertically and side to side after the pour with 3/4" thick composite strainer protective cover and indicating whisker.

Function: Used in showers, kitchens, restrooms, and other membrane finished areas. Square adjustable nickel bronze heel proof strainer is used for floors that are tiled or straight line patterns. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and the three Phillips head screws underneath the grate can be engaged to raise the strainer vertically & to also adjust it side to side.

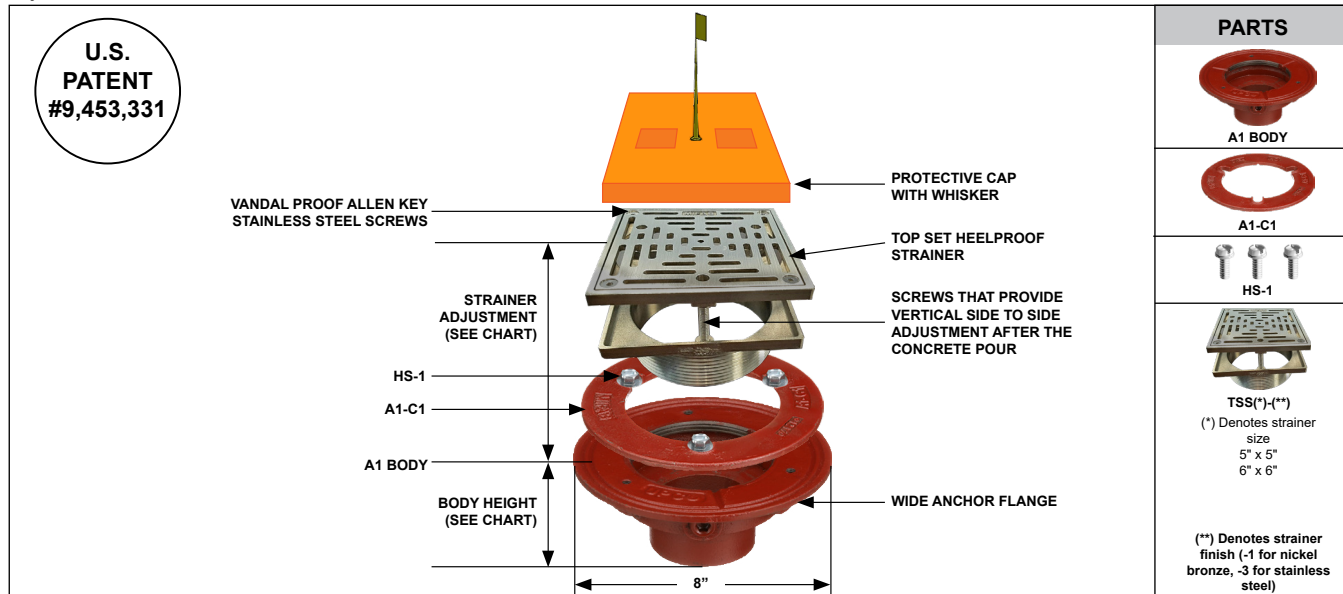

PARTS	
	A1 BODY
	A1-C1
	HS-1
	TSS(*)-(**) (*) Denotes strainer size 5" x 5" 6" x 6"
(**) Denotes strainer finish (-1 for nickel bronze, -3 for stainless steel)	

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT				
	MIN	MAX	LOAD RATING Lbs.				NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
			FREE AREA	N.B. (-1)	S.S. (-3)						
5" x 5"	7/8"	3 1/8"	9 in ² (5200 ²)	2,000	5,000-7,499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6" x 6"	1 1/8"	3 1/2"	12 in ² (7700 ²)	2,000	5,000-7,499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
						4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
						5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
						6" (152)	3 1/2" (89)	6 7/8" (175)	--	--	--

SUFFIX	OPTIONAL VARIATIONS
-1	Nickel Bronze heelproof strainer
-3	Heavy duty stainless steel square heelproof strainer
-5	Sediment bucket
-6	Security screws (T-20 Torx & pin)
-7	1/2" trap seal primer connection
-8	Backwater valve (2", 3", 4")
-11	Acid resistant epoxy coated body
-13	Galvanized body
-15	Extension
-21	Secondary flat stainless steel strainer (2", 3", 4")
-28	Stainless steel body (Type 304)
-30	PVC socket connection body
-31	ABS socket connection body
-34	Closure plug
-40	Underdeck clamp
-41	Sump receiver
-49	Chrome plated strainer
-50	Lacquered cast iron funnel

-90	Threaded side outlet (2", 3", 4") (cast iron only)
-90NH	No hub side outlet (2", 3", 4") (cast iron only)
-95	Client logo
-ARRA	American Iron and Steel Act Compliant
-BA	Minimum 51% material cost made in the USA
-C2	High rough-in membrane clamp (min. 1 9/16" (40))
-F4	4" Round funnel
-F6	6" Round funnel
-G	Oval 4" x 9" funnel
-J	6" x 3" x 1" funnel
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-P	Push on outlet
-PA	Pennsylvania Steel Act compliant product
-T	Threaded outlet (2", 3", 4")
-X	Inside caulk outlet
-Z	Extended wide elastomeric flang

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____