
Installation instruction for following floor sinks:
P4080; P4120; FS1910-FL; FS1920-FL; FS1930-FL and FS1940-FL

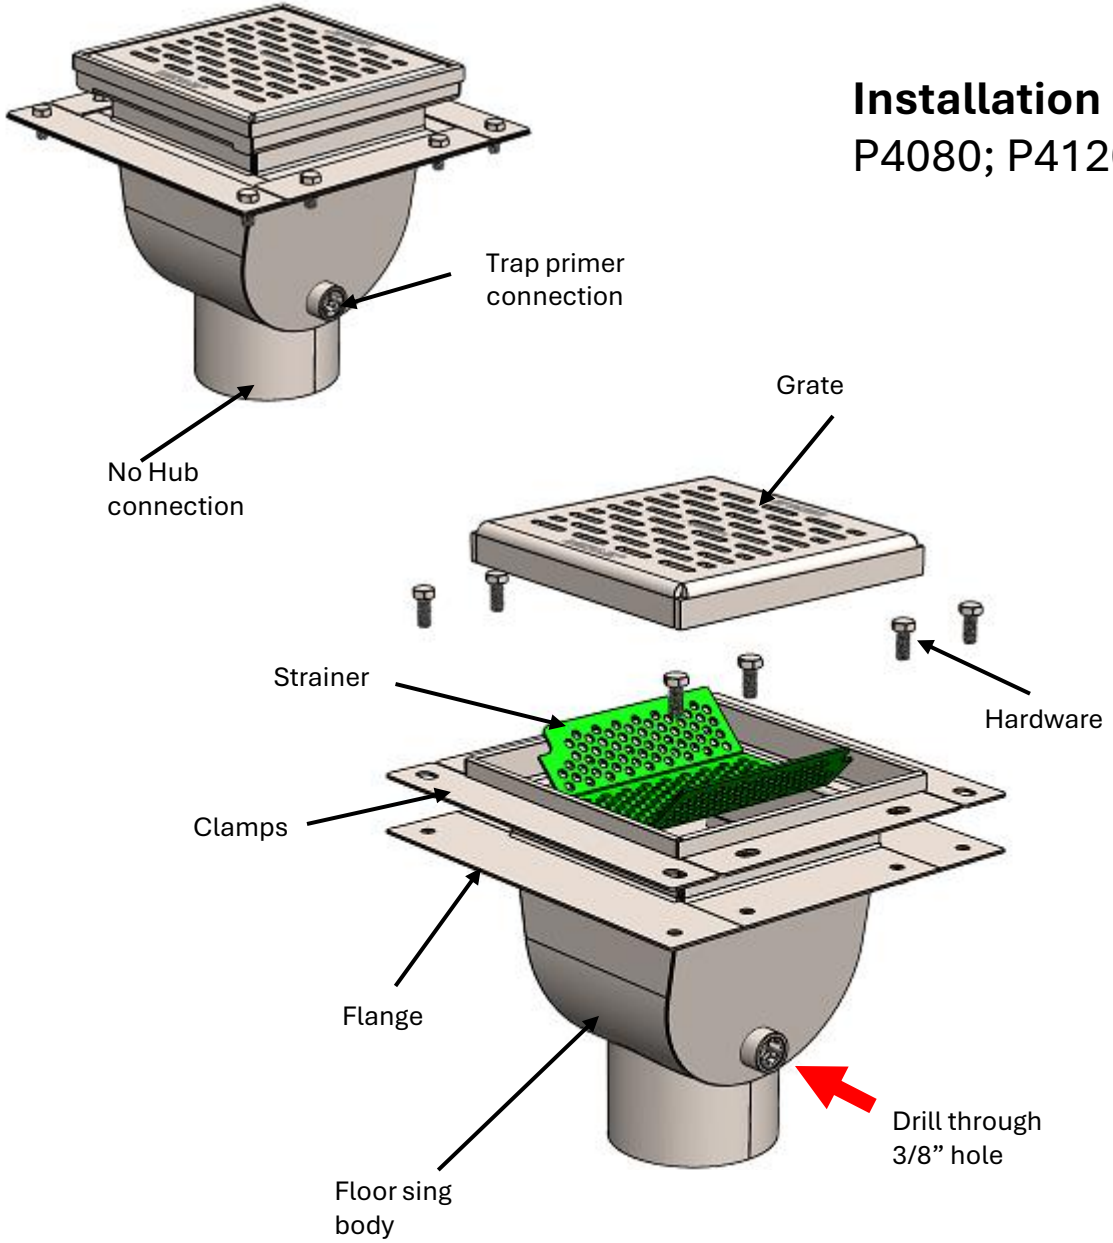

1. If trap primer connection is required, must drill 3/8” hole through body wall, using the guide of already welded nipple.
2. Fix the floor sink body into the floor.
3. Connect the trap primer.
4. Connect the body to drainpipe using hub coupling
5. Add the membrane seal to the top of flange
6. Secure the clamps with provided hardware
7. Complete with finish floor
8. Insert the strainer
9. Attached the grate