
Location: _____

MIFAB® R1150-SPEC

COMBINED ROOF DRAIN AND SECONDARY OVERFLOW SYSTEM WITH LOOSE SET SUMP RECEIVER

Specification: MIFAB® Series R1150-SPEC combined roof drain and secondary overflow system, consisting of a galvanized sump receiver; two lacquered cast iron roof drain bodies with anchor flanges, cast iron waterproofing membrane clamp rings with integral gravel stops, one 4" (102) diameter adjustable ABS overflow standpipe and two self-locking cast iron dome strainers with a free area of 43 square inches each.


Function: Used in any type of conventional or flat roofs where a safety overflow, which receives water only when the accumulation is greater than the height of the standpipe is required to be located beside a standard roof drain. The standpipe can be adjusted to attain the desired overflow water depth. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

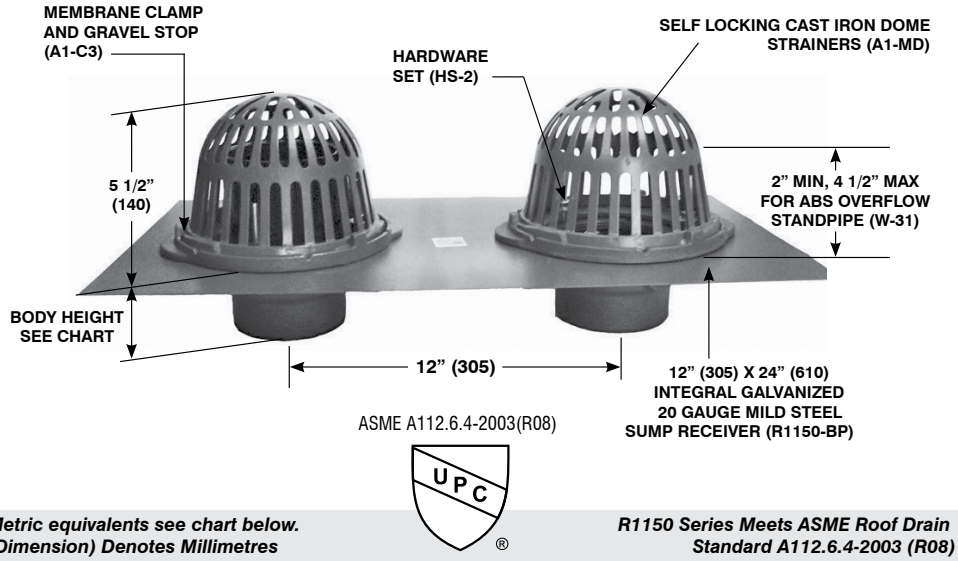


Metric equivalents see chart below. (Dimension) Denotes Millimetres

R1150 Series Meets ASME Roof Drain Standard A112.6.4-2003 (R08)

PARTS:




A1 BODY



R1150-BP




A1-MD



HS-2



A1-C3


W-31

MODEL NO.	PIPE SIZE	BODY HEIGHT				
		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
○ **R1152-SPEC**	○ 2" (51)	▭ 3" (76)	▭ 3 3/8" (86)	▭ 2 1/4" (57)	▭ 3 3/4" (95)	▭ 2 5/8" (67)
○ **R1153-SPEC**	○ 3" (76)	▭ 3" (76)	▭ 3 3/8" (86)	▭ 2 5/8" (67)	▭ 3 3/4" (95)	▭ 3 1/4" (83)
○ **R1154-SPEC**	○ 4" (102)	▭ 3" (76)	▭ 3 3/8" (86)	▭ 2 5/8" (67)	▭ 3 3/4" (95)	▭ 3 1/2" (89)

	Suffix	Description
▭	**-6**	Vandal proof domes
▭	**-11**	Acid resistant epoxy coating
▭	**-12**	Galvanized metal domes
▭	**-12A**	Galvanized bodies and membrane clamps
▭	**-13**	Galvanized bodies, membrane clamps and domes
▭	**-28**	Stainless steel bodies (Type 304) (2", 3", 4")
▭	**-30**	PVC socket connection bodies
▭	**-31**	ABS socket connection bodies
▭	**-81**	Rough bronze domes
▭	**-83**	Stainless steel mesh screen over domes
▭	**-90**	Threaded side outlets (2",3",4")
▭	**-90NH**	No Hub side outlets (cast iron only) (2", 3", 4")

▭	**(Standard)**	No hub outlets
▭	**-BA**	Minimum 51% material cost made in the USA
▭	**-E**	Adjustable extension
▭	**-EG**	Galvanized Adjustable extension
▭	**-G**	Stainless steel ballast guards
▭	**P**	Push on outlets
▭	**-PSA**	Pennsylvania Steel Act compliant product
▭	**T**	Threaded outlets (2",3",4")
▭	**-U**	Underdeck clamps
▭	**-U3**	Underdeck clamps with cutaway side
▭	**-W-1**	Water proofing flange
▭	**X**	Inside caulk outlets (2",3",4")
▭	**-XJ**	Vertical expansion joint (see R1900)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB® *reserves the right to make changes in material and design without formal notice and obligation.*

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880