

Location: _____




MCL

HYDRO MECHANICAL ECONOMY GREASE INTERCEPTOR

Specification: MIFAB® Series MCL-G ____ sanitary acid resistant, powder epoxy coated inside and outside fabricated 14 gauge steel hydro mechanical grease interceptor with flow rating of ____ (indicate) and grease holding capacity of ____ (indicate). Unit shall include: removable baffle assembly and cross bar, internal flow control, deep seal trap covered by lid, sewer gas stopper, securing bolt(s), internal air relief by pass, feet underneath interceptor to elevate it 1/2" off the ground, and steel acid resistant, powder epoxy coated, non skid, rectangular gasketed lid(s). Interceptor shall be tested and certified to the P.D.I. Standard PDI-G101 and ASME A112.14.3 and be so marked.

Function: Used in restaurants, kitchens, institutions and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. External flow control fitting must be installed according to manufacturer's instructions to control rate of flow into the interceptor and therefore, the operating efficiency. Interceptor may be installed on the ground, semi recessed or flush with the floor. Single bolt lid design (up to MCL-G-5) permits fast and easy removal of the lid for cleaning and maintenance. Standard acid resistant, powder epoxy coated lid and body ensures maximum protection from contaminants. Sewer gas stopper prevents foul odors from entering the kitchen area through the interceptor. 1/2" feet underneath the interceptor elevates the bottom steel plate from the wet ground.

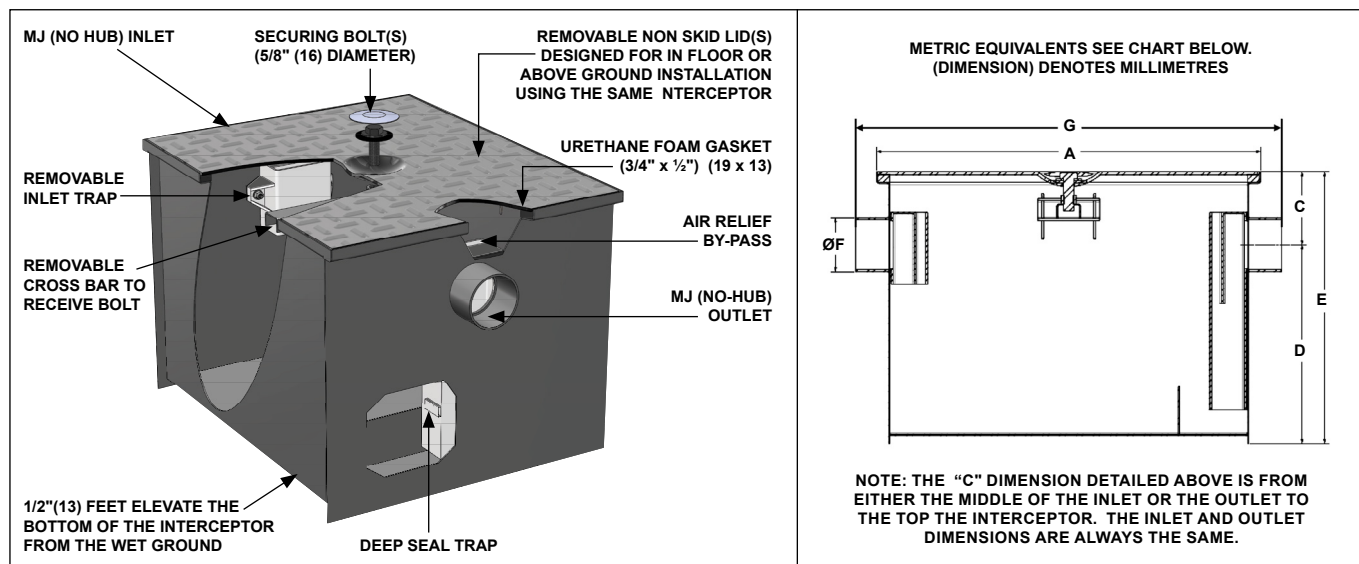

MODEL NO.	US G.P.M.	CAPACITY Lbs. (KG.)	A In (mm)	B WIDTH In (mm)	C In (mm)	D In (mm)	E In (mm)	F In (mm)	NO. OF BOLTS	SHIPPING EIGHT (lbs.)	WEIGHT WHEN FILLED WITH WATER (lbs.)
○ MCL-G-0	4 (15)	8 (4)	16.75" (425)	11.25" (286)	2.5" (63)	8.5" (216)	11" (279)	2" (51)	1	50	87
○ MCL-G-1	7 (26)	14 (6)	17.75" (451)	13.75" (349)	3.5" (89)	8.5" (216)	12" (305)	2" (51)	1	60	111
○ MCL-G-2	10 (38)	20 (9)	21.25" (540)	15.75" (400)	3.5" (89)	9.5" (241)	13" (330)	2" (51)	1	80	162
○ MCL-G-3	15 (57)	30 (14)	23.75" (603)	15.75" (400)	3.5" (89)	11.5" (292)	15" (381)	2" (51)	1	95	209
○ MCL-G-4	20 (76)	40 (18)	23.75" (603)	15.75" (400)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	100	235
○ MCL-G-5	25 (94)	50 (23)	27.75" (705)	18.75" (476)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	125	320
○ MCL-G-6	35 (132)	70 (32)	31.25" (794)	23.75" (603)	5.5" (140)	16.5" (419)	22" (559)	3" (76)	1	185	531
○ MCL-G-7	50 (189)	100 (45)	31.25" (794)	23.75" (603)	5.5" (140)	18.5" (470)	24" (610)	3" (76)	1	195	587
○ XL-MCL-G-0	75 (283)	150 (68)	42" (1067)	28" (711)	6" (152)	26" (660)	32" (813)	4" (102)	2	250	942
○ XL-MCL-G-1	100 (379)	200 (91)	55" (1397)	37" (940)	8" (203)	26" (660)	34" (864)	4" (102)	2	400	1184

SUFFIX	OPTIONAL VARIATIONS
☐ -BA	Buy American Act compliant product
☐ -EP	Enzyme port
☐ -PDI	PDI plate and external, vented flow control fitting (to meet PDI G-101 Standard)
☐ -T	F.I.P. female threaded inlet and outlet

Note: Reduce the "A" and "B" dimensions by 1" (25) to determine the actual body length and width dimensions. The lid overhangs the body by 1/2" (13) on all four sides.



MODELS MCL-G-4 TO MCL-G-7 ARE
TESTED AND CERTIFIED TO I.A.P.M.O.
GREASE TRAP STANDARD PS-13-89



Models MCL-G interceptors are tested and certified to the ASME
Standard A112.14.3. All interceptors are shipped with an internal,
vented, flow control fitting.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____