

Location: \_\_\_\_\_




# F1830-PL

## LARGE PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE AND DOME

**Specification:** MIFAB® Series F1830-PL lacquered cast iron standpipe type planting area drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and adjustable 4" (102) diameter ABS perforated standpipe and stainless steel secured dome.

**Function:** Used in areas such as flower boxes and others where the drain is buried underground. Perforated standpipe allows for sub surface drainage of water. The stainless steel dome secured to the top of the standpipe is set at ground level and permits the drainage of excess surface water. Membrane clamp is provided to secure the waterproofing membrane.

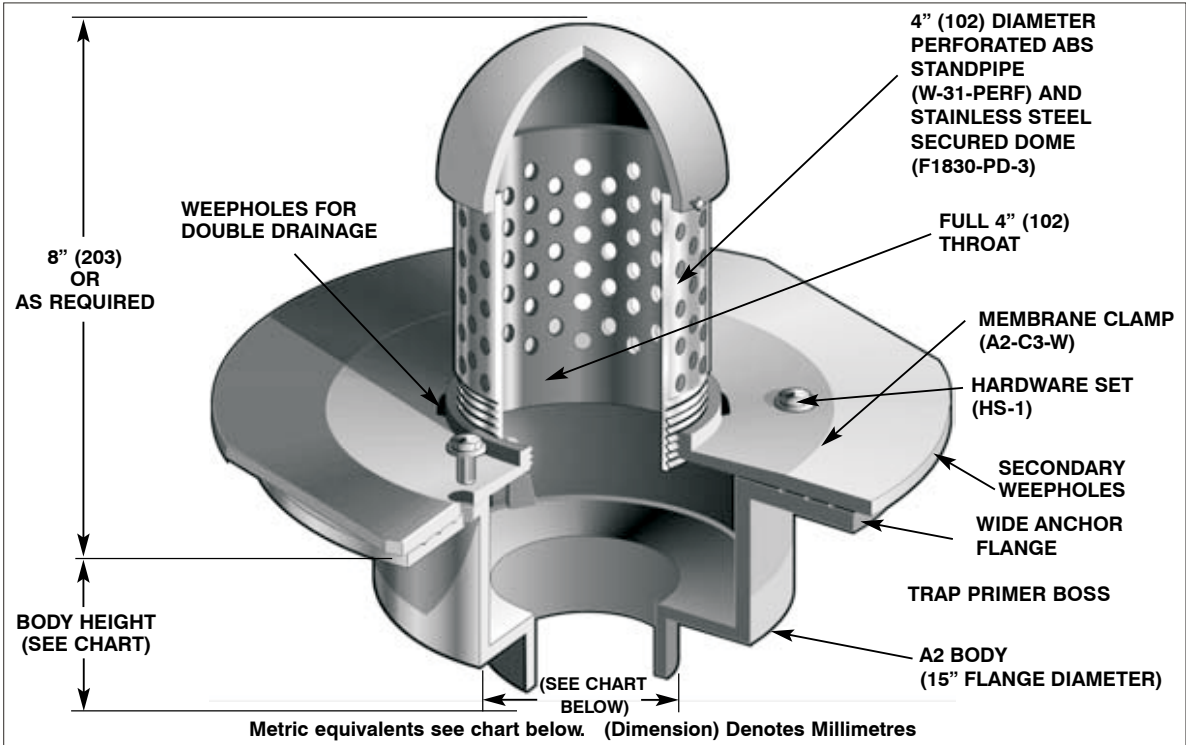

**PARTS:**

-  A2 Body
-  W-31-PERF and F1830-PD-3
-  A2-C3-W
-  HS-1

F1830-PL Series meets ANSI/ASME floor drain standard A112.6.3-2001

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
6" (152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	—

- SUFFIX      OPTIONAL VARIATIONS**
- 11      Acid resistant epoxy coated body
  - 13      Galvanized body
  - 28      Stainless steel body and grate (Type 304)
  - 30      PVC socket connection body
  - 31      ABS socket connection body
  - 40      Underdeck clamp
  - 41      Sump receiver
  - 43      Solid standpipe
  - 79      Standpipe over 8", per inch
  - 83      Stainless steel mesh screen around pipe
  - 90      Threaded side outlet (2", 3", 4")

- SUFFIX      OPTIONAL VARIATIONS**
- 90NH      No hub side outlet (2", 3", 4")
  - 92      Stainless steel perforated stand pipe
  - BA      Minimum 51% material cost made in the USA
  - (Standard)      No hub outlet
  - MG      MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
  - P      Push on outlet
  - PA      Pennsylvania Steel Act compliant product
  - T      Threaded outlet (2", 3", 4")
  - X      Inside caulk outlet

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_

Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_