Location:




FIXTURE CARRIER WITH CONCEALED ARMS

Specification: MIFAB[®] Series MC-41 floor mounted concealed arm lavatory carrier with lacquered, adjustable, ductile iron concealed support arms. Complete with lacquered cast iron invertible and adjustable arm supporting brackets, adjustable steel nipples with locknut and set screws, alignment rod, two lacquered 2" x 1" x 1/8" thick structural steel uprights with 3" x 4 $\frac{1}{2}$ " welded steel feet and fixture leveling and locking hardware.

Function: Used to support off-the-floor fixtures so that the vertical load bearing components are concealed within the wall. The fixture carrier has no contact with the finished floor inside of the room.

MC-41

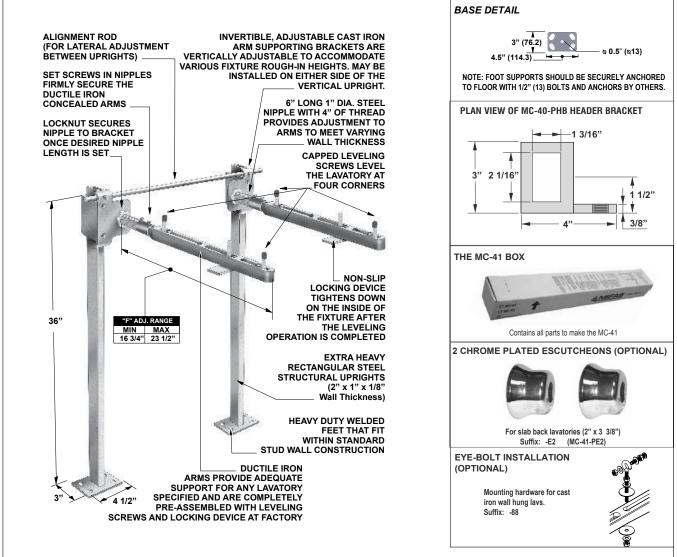

MC-41 Series Meets ANSI/ASME fixture carrier standard A112.6.1M-97 250 Lb. Load Rating NOTE: See the various fixture dimensional rough-in guides on the www.mifab.com website.

SUFFIX	OPTIONAL VARIATIONS	-PA	Pennsylvania Steel Act compliant product
-A	Nipple length over 6" (specify)	-PFAB	Prefabricated carrier
-В	Floor to ceiling uprights (specify height required)	-SL	3/4" Slots in legs – to receive 1/2" water piping through legs
-BA	Minimum 51% material cost made in the USA	see MC-42	Paraplegic Rough-in
-E2	2" chrome plated escutcheons (pair)	see MC-41D	Back to back system
-G	Wall support plate	-32	Foot pedal mounting plate
-NW	1" x 5/8" slots through each upright to accommodate piping for narrow wall installations	-88	Mounting hardware for cast iron wall hung lavs

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _

Page No: _____ Contractor: _

Section No:

Purchase Order No: ____

Schedule No: _

MIFAB[®] reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

2023-05-04 RH