
## KIFAB<sup>®</sup> FS1520-TB

## 8" X 8" X 6" FLOOR AREA AND INDIRECT SANITARY WASTE DRAIN

**Specification:** MIFAB Series FS1520-TB, 8" x 8" x 6" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated inferior and loose set grate. Anti-splash aluminum dome strainer included.

**Function:** Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a medium volume sanitary drain. The light duty grate is not recommended for foot traffic. The floor sink body is made with a 4" NPSM threaded connection so that any one of MIFAB's A1 bodies can be threaded onto the underside of the body with a water sealing gasket between the underside of the floor sink and the A1 body.

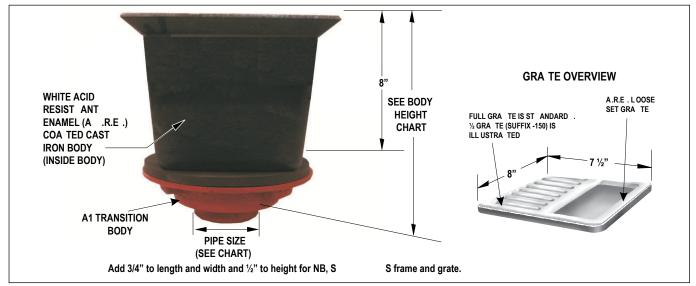

\*Indicates outlet size and connection available with transition outlet body only. \*\*4" Inside Caulk Outlet body only available with -FL anchor flange. Not available with a transition outlet body. One piece body only. Outlet sizes indicated by the \* are available with the transition outlet body only.

PIPE SIZE	A1 BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 5/8" (67)
3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 1/4" (83)
4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 1/2" (89)	3 1/2" (89)
PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30), AVS (-31)
2" (51)	*9 1/4" (235)	*9 5/8" (244)	*10" (254)	*8 1/2" (216)	*9 5/8" (244)
3" (76)	*9 1/4" (235)	*9 5/8" (244)	*10" (254)	*8 7/8" (225)	*9 5/8" (244)
4" (102)	*9 1/4" (235)	*9 5/8" (244)	**8 5/8" (219)	*8 7/8" (225)	*9 5/8" (244)
SUFFIX	OPTIONAL VARIATIONS		SUFFIX	OPTIONAL VARIATIONS	
-1	Nickel bronze frame and grate		-90NH	No hub side outlet	
-3	Stainless steel frame and grate		-95	Client logo (-1, -3 only)	
-5	Sediment bucket		-150	1/2 grate	
-6	Security screws (1, -3 only, H-1039A, 4 pcs.)		-175	3/4 grate	
-7	1/2" trap seal primer connection		-BA	Buy American Act compliant product	
-8	Backwater valve (2", 3" or 4")		(Standard)	No hub outlet	
-9	Hinged grate (-3 only)		-C	Membrane clamp with hardware	
-21	Secondary flat stainless steel strainer		-F4	4" round funnel	
-22	Less grate		-F6	6" round funnel	
-30	PVC outlet		-FL	Anchor flange	
-31	ABS outlet		-G	4" x 9" oval funnel	
-32	Deep seal trap with flushing connection		-J	3" x 1" oval funnel	
-50	A.R.E. coated cast iron funnel		-P	Push on outlet	
-51	2 1/2" round center hole in grate (-1, -3 only)		-PA	Pennsylvania Steel Act compliant product	
-69	Stainless steel sediment bucket		-Т	Threaded outlet	
-83	Stainless steel mesh screen over sediment bucket		х	Inside caulk outlet	
-90	Threaded side outlet		-Z	Extended wide elastomeric flange (with -FL only)	

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:

Section No:

Schedule No:

Page No: \_ Contractor:

Purchase Order No:

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880