

Location: _____




F1170-C

FLOOR DRAIN WITH MULTI INLETS, ROUND STRAINER AND INTEGRAL TRAP

Specification: MIFAB® Series F1170-C lacquered cast iron body and anchor flange, weepholes, 3" or 4" no hub side outlet, integral deep seal trap with cleanout plug and adjustable (specify material finish) strainer with T-20 torx and pin security screws. (Specify -44, 2" (51) no hub inlets as shown and required. Maximum three @ 90 degrees. Specify location -A, B, or C.)

Function: Used in toilets, kitchens and other membrane finished areas where additional inlets are required to receive drainage. Integral deep seal trap prevents sewer gas from entering area.

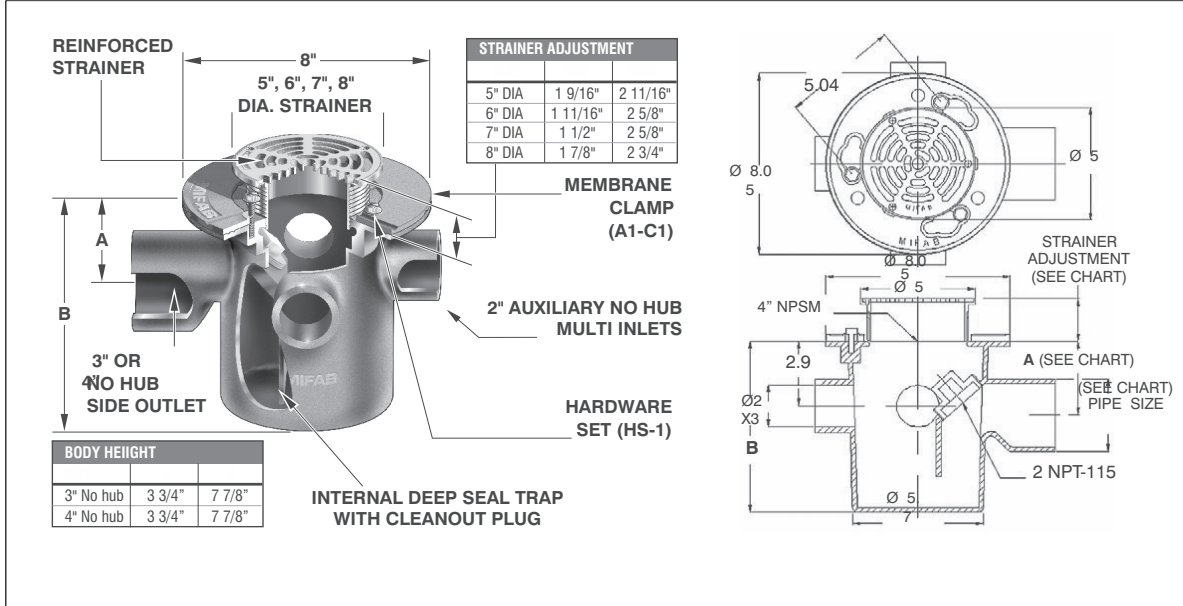

MODEL NUMBER	OUTLET SIZE	WT. LBS.	STRAINER ADJUSTMENT
F1173, 4-C-5	3" 4"	21.00	5" DIA
F1173, 4-C-6	3" 4"	21.50	6" DIA
F1173, 4-C-7	3" 4"	22.00	7" DIA
F1173, 4-C-8	3" 4"	23.00	8" DIA

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer and cover
- 3 Stainless steel strainer
- 4 Ductile iron grate (5" x 8" only) (standard)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 34 Closure plug
- 44 2" (51) no hub inlet (specify A, B, C locations)
- 50 Lacquered cast iron funnel

SUFFIX OPTIONAL VARIATIONS

- 95 Client logo
- BA Minimum 51% material cost made in the USA
- C2 High rough-in membrane clamp (min. 1 9/16" 40)
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 6" x 3" x 1" funnel
- MG MI-GARD Floor Drain Trap Seal (2", 3" or 4")
- PA Pennsylvania Steel Act compliant product
- Z Extended wide elastomeric flange

(*) Denotes strainer size (5, 6, 7 or 8)
 (**) Denotes strainer finish (-1 or -3)

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____