

Location: _____




F1320-TA-4

9" ROUND AREA DRAIN TOP ASSEMBLY WITH DUCTILE IRON ADJUSTABLE, HEELPROOF TRACTOR GRATE

Specification: MIFAB® F1320-TA Series of lacquered, 9" round area drain top assembly with ductile iron, adjustable, heelproof, tractor grate and lacquered cast iron shank with 4" N.P.S.M. threads. Designed to thread into any of MIFAB's A1 bodies. Specify -1 or -3 for 3/8" thick cast nickel bronze or stainless steel grate and frame veneers. Heelproof grate to have maximum 1/4" slot openings. Grate free area of 18 square inches.

Function: Used to provide drainage in high-traffic or mechanical areas, suitable for parking garages, mechanical rooms, industrial facilities, and commercial floors. Adjustable top assembly provides easy adjustment for the installer.

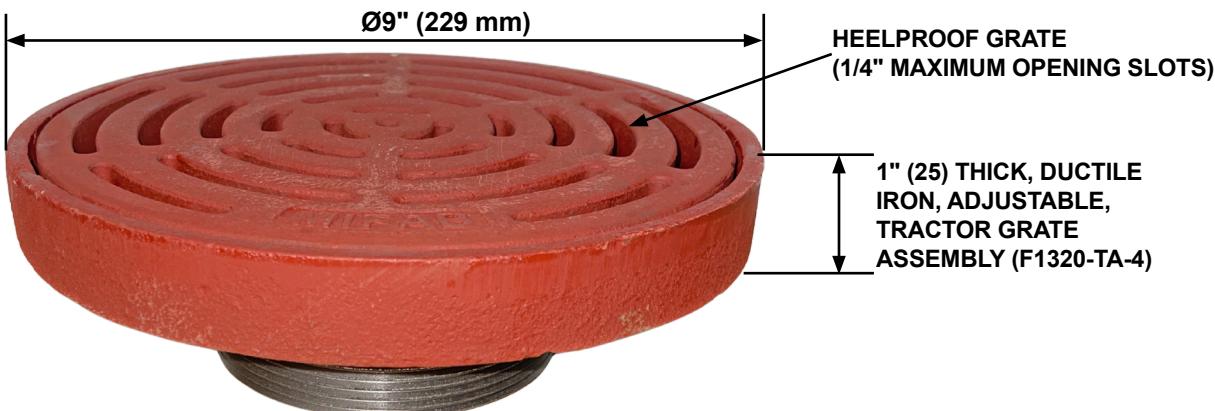

PART NO.	DESCRIPTION	TYPE	MATERIAL	FREE AREA	LOAD RATING (OVER LBS.)	WEIGHT (LBS.)
F1320-TA-(1-3)	9" round DI top assembly w/ NB or SS Veneer (add 3/8" to overall height with veneer)	9" Round grate	Ductile iron	18.0 IN ²	10,000	12
F1320-TA-4	9" round ductile iron top assembly	9" Round grate	Ductile iron	18.0 IN ²	10,000	10.5

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____