Location: _____

MIFAB® | **MC-33** | **HANGER PLATE CARRIER WITH THREE UPRIGHTS**

Specification: MIFAB® Series MC-33 hanger plate carrier with two universal, adjustable, top support plates. Complete with three lacquered 2" x 1" x 1/8" thick structural steel uprights with 3" x 4 ½" welded steel feet and mounting hardware.
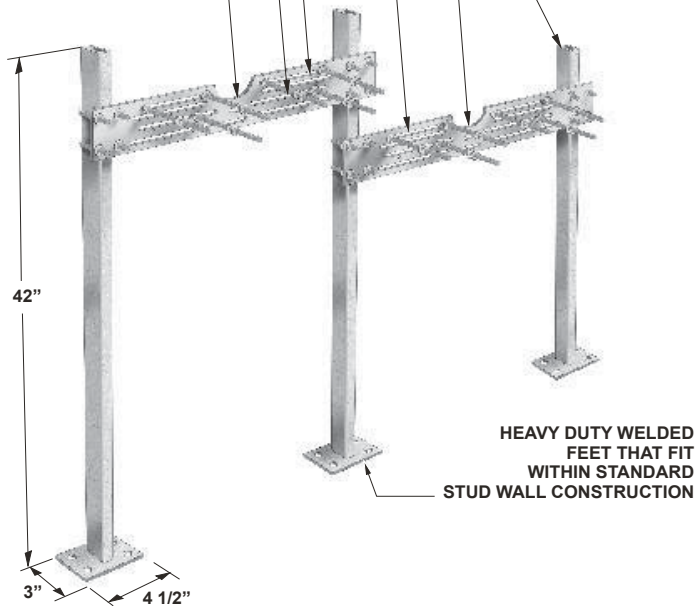
Function: Used to support wall-hung fixtures such as urinals and water coolers that are independent of the wall. Designed for use in conjunction with the fixture hangar plate supplied by the fixture manufacturer.

UNIVERSAL PLATE ASSEMBLY, SECURED TO UPRIGHTS WITH "U" BOLTS TO PROVIDE EASE OF ROUGH-IN HEIGHT ADJUSTMENT

EXTRA HEAVY RECTANGULAR STEEL STRUCTURAL UPRIGHTS (2" x 1" x 1/8" Wall Thickness)

(1/4"-20 x 8"ALL THREADED PLATED RODS (6 PIECES) W / HARDWARE

CUTOUT FOR FIXTURE WITH BACK SUPPLY

42"

3"   4 1/2"

HEAVY DUTY WELDED FEET THAT FIT WITHIN STANDARD STUD WALL CONSTRUCTION
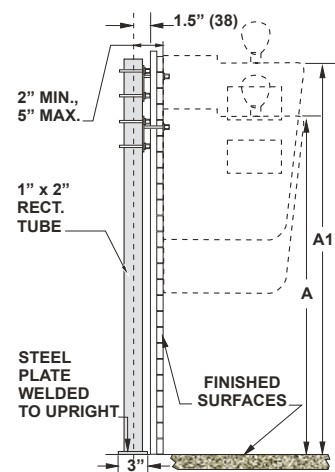
MC-33 Series Meets ANSI/ASME fixture carrier standard A112.6.1M-97
300 Lb. Load Rating

NOTE: FOOT SUPPORTS SHOULD BE SECURELY ANCHORED TO FLOOR WITH 1/2" (13) BOLTS AND ANCHORS BY OTHERS.
Note: See the various fixture dimensional rough-in guides on the www.mifab.com website.

0.63" (15.9)   C   C   1.37" (34.9)

D   D

(4) 1/4" SUPPORTING STUDS

B   E   G   F

FINISHED FLOOR

4.5" (114.3)

BASE DETAIL

2.8" (71.1)
3" (76.2)   1.8" (45.7)
4.5" (114.3)   ⌀ 0.5" (⌀13)

1.5" (38)

2" MIN., 5" MAX.

1" x 2" RECT. TUBE

A1
A

STEEL PLATE WELDED TO UPRIGHT

FINISHED SURFACES

3"
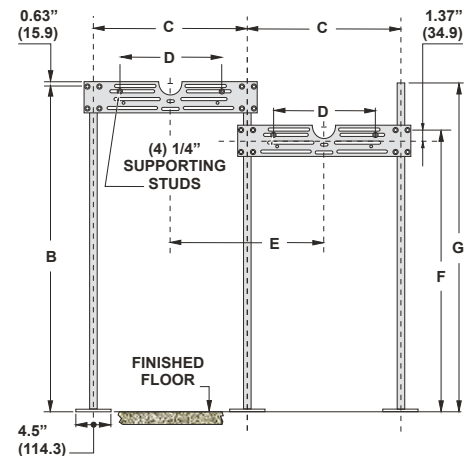
SUFFIX	OPTIONAL VARIATIONS
-A	Stud length over 8" (specify)
-BA	Minimum 51% material cost made in the USA
-HDH	Heavy duty hanger
-PA	Pennsylvania Steel Act compliant product
-PFAB	Prefabricated carrier
-SL	¾" Slots in legs – to receive ½" water piping through legs
-Z	Higher uprights (over 42")

***Plate carrier assemby for bi-level fountain and bottle filler** (Contact MIFAB for part number)

Job Name: _____   Page No: _____

Section No: _____   Contractor: _____

Schedule No: _____   Purchase Order No: _____

2025-10-09