


Location: _____



MIFAB® MI-FLEX-EXP EXPANSION JOINTS

Specification: MIFAB® Series MIFAB's MI-FLEX-EXP Series of expansion joints are used to connect cast iron or plastic to cast iron or plastic pipe - 2", 3" and 4" sizes only. 6" and 8" models work with cast iron pipe only

Function: Used to reduce the expansion and contraction movements in vertical leaders, pipes, stacks and vents or soil lines in order to prevent damage to this material and to the building. For couplings with two bands, tighten 1-2, alternately until minimum 60 inch lbs. of torque is attained for each band. Tested to maintain 4.3 p.s.i. maximum line pressure (10' head pressure) 5/16" driver required to tighten bolts.

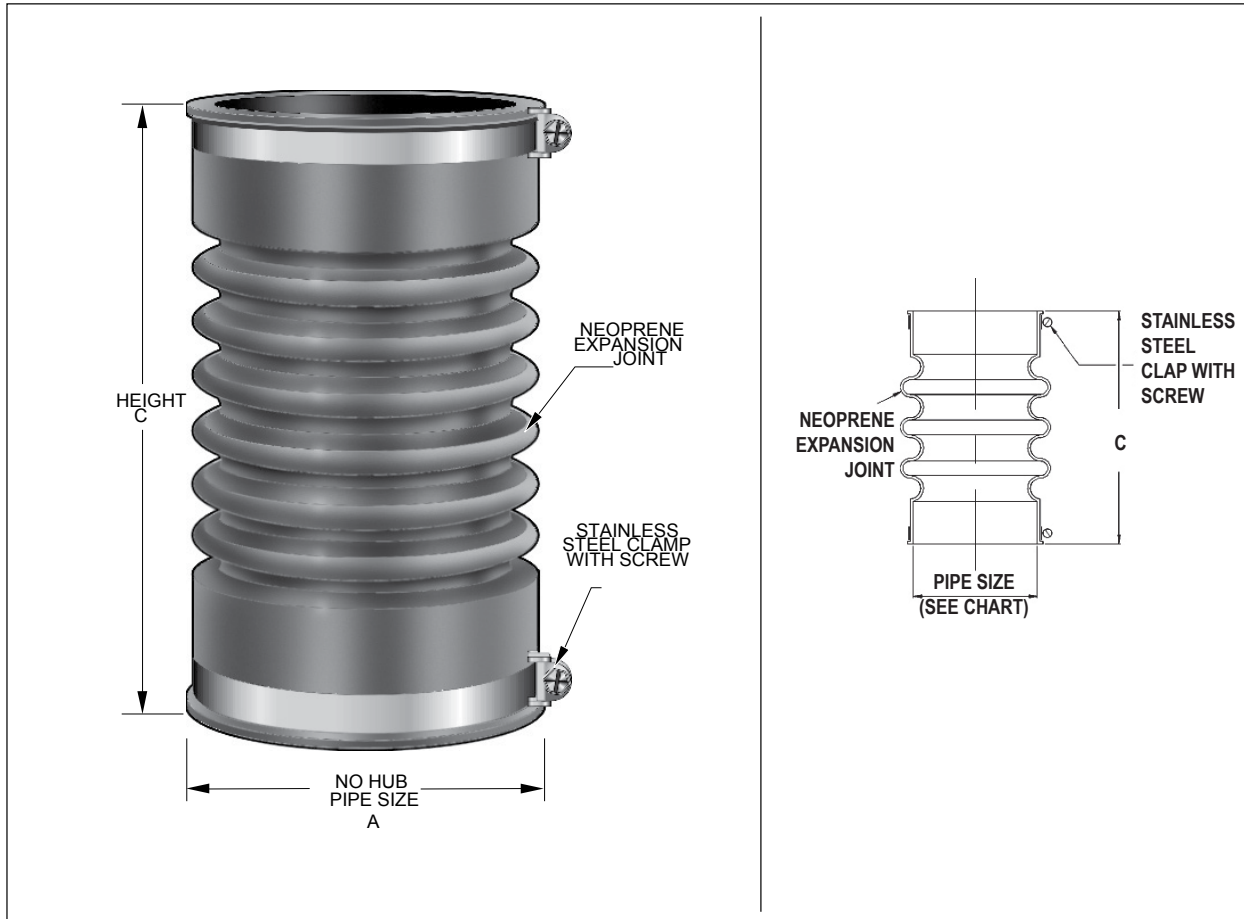

Note: Effective temperature range is from 20°F to 122°F.

MODEL NUMBER	A PIPE SIZE	C HEIGHT
MI-FLEX-EXP-2	2" PVC or C.I. pipe x 2" PVC or C.I. pipe	7 1/8" (178)
MI-FLEX-EXP-3	3" PVC or C.I. pipe x 3" PVC or C.I. pipe	8 1/8" (203)
MI-FLEX-EXP-4	4" PVC or C.I. pipe x 4" PVC or C.I. pipe	8 5/8" (216)
MI-FLEX-EXP-6	6" C.I. pipe x 6" C.I. pipe	8 5/8" (216)
MI-FLEX-EXP-8	8" C.I. pipe x 8" C.I. pipe	11" (279)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880