

Location: _____



MI-FLEX-SOS

FLEXIBLE COUPLINGS PLASTIC SOCKET TO PLASTIC SOCKET




Specification: MIFAB® Series MI-FLEX-SOS (specify size) of flexible rubber couplings are manufactured from neoprene compound that meets the requirements of ASTM C564 and stainless steel clamps tightened with 5/16" Type 300 stainless steel hex head screws. MI-FLEX Series of flexible couplings are tested and certified to ASTM Standard C1173 and CSA Standard B602 and listed with IAPMO.

Function: MIFAB's MI-FLEX-SOS Series of flexible rubber couplings are used to connect plastic socket to plastic socket pipe. For couplings with two bands, tighten 1-2, alternately until minimum 60 inch lbs. of torque is attained for each band. Tested to maintain 4.3 p.s.i. maximum line pressure (10' head pressure). Conforms to ASTM D5926. Use a 5/16" driver required to tighten bolts. Non constant temperature rating is 140 F. Stainless Steel Clamps and 5/16" hex head bolts are made from Type 300 Stainless Steel.

Material Specifications:

- Bands** – Type 300 AISI stainless steel (Minimum tensile 165,000 psi).
- Gasket** – Elastomeric compound that meets the requirements of ASTM C-564.
- Screw Housing** – Type 300 AISI stainless steel.
- Screw** – Type 300 AISI stainless steel, 5/16" Hex head / Shoulder.

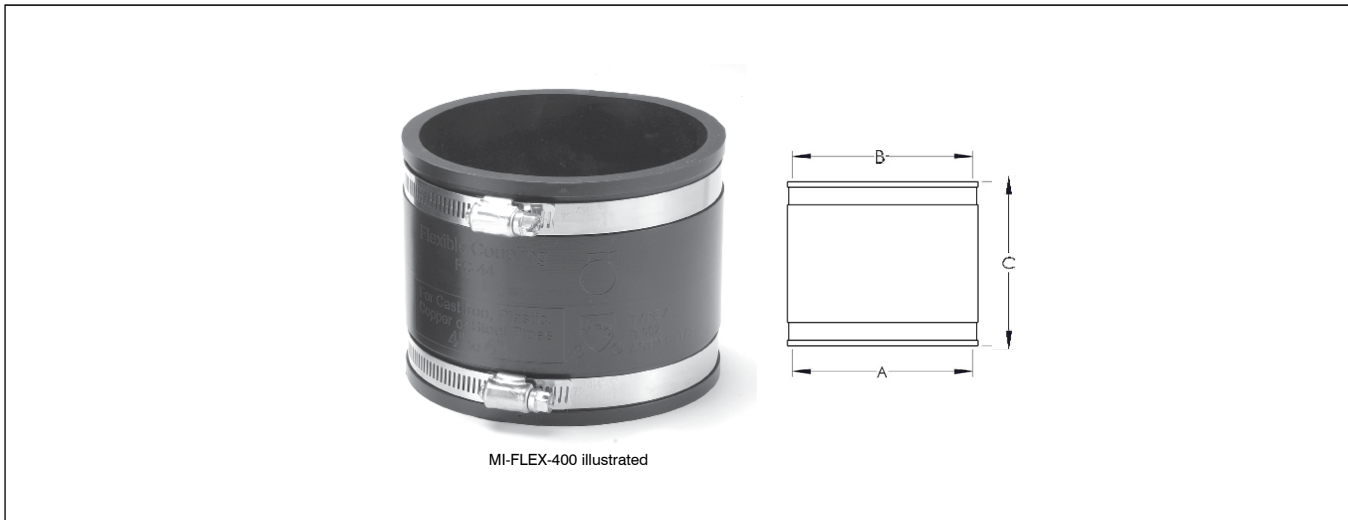

MODEL NUMBER	PIPE SIZE	A	B	C HEIGHT
MI-FLEX-3-SOS	3" Clay x 3" Clay	3.94" (100)	4.32" (110)	3.94" (100)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____