

Location: \_\_\_\_\_




**P3080**

**8" ROUND, ADJUSTABLE DEPTH, TYPE 316  
STAINLESS STEEL FABRICATED FLOOR DRAIN**

**Specification:** MIFAB® Series P3080, 8" round floor drain manufactured out of 16 gauge, Type 316 stainless steel with anchor flange and slotted heavy duty stainless steel grate with bead blasted finish and sediment bucket. Grate free area of 18 square inches. Bottom outlets are available in 4" or 6" no hub outlet connections and fabricated as part of the floor drain.


**Function:** Used in industrial, commercial, kitchen and other hygienic areas. Type 316 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. All grate openings are polished to a smooth finish. Deep sump ideal for installations that require a sediment bucket to receive debris. Adjustable top assembly for easier installation.

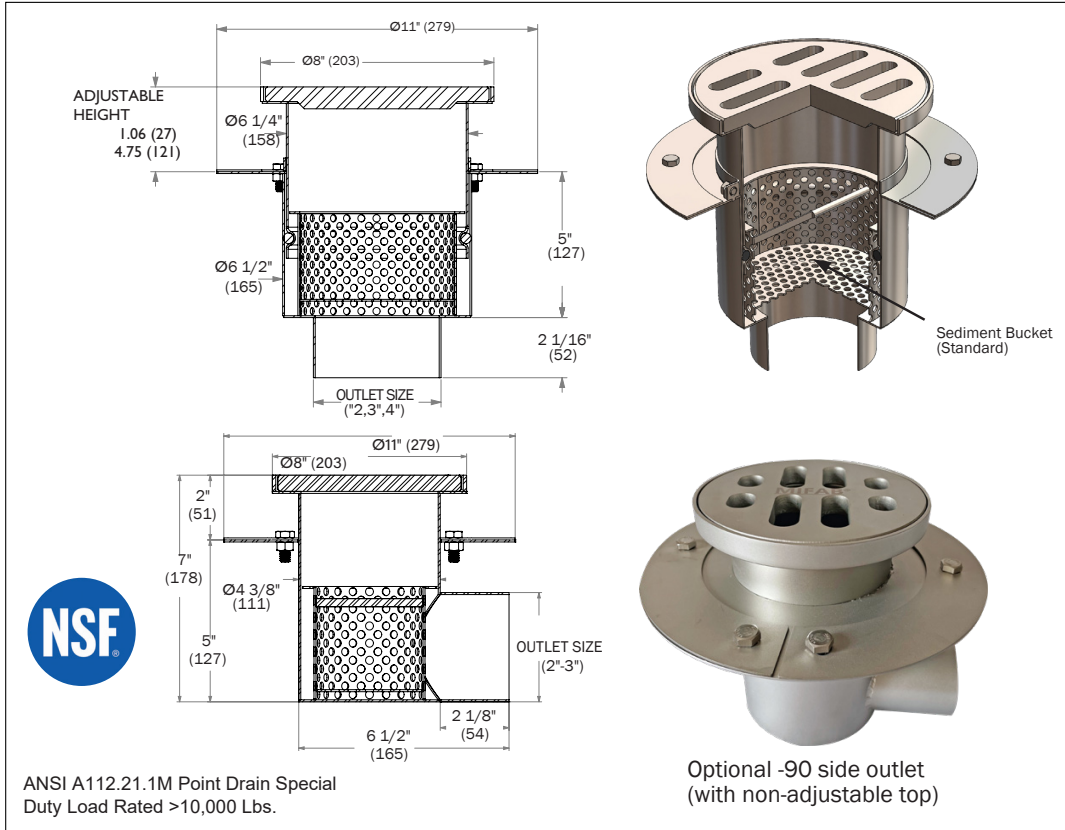

#### GRATES



-RS  
Heavy duty slotted grate  
with finger holes



-PD  
Heavy duty solid cover  
with perimeter drain gap

#### OPTIONAL VARIATIONS

- 6 Vandal Proof
- 7 1/2" Trap Seal Primer Connection
- 7MG MI-GARD Trap Seal Protection device (4" or 6")
- 90 No Hub side outlet connection (specify 4" or 6")
- 150 1/2" Grate
- 175 3/4" Grate
- BW Butt weld outlet connection (2" or 3")
- C Membrane Clamp (includes anchor flange)
- NS 1/2" thick, heavy duty solid cover with perimeter drain gap
- PD 1/2" thick, heavy duty round slotted grate with finger holes
- RS Anti-slip grate
- T Threaded Outlet

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_