


P4080

P4080 - 8" x 8" x 8" Deep Stainless Steel Fabricated Floor Sink with Radiused inside Sump

Specification: MIFAB* Series P4080, 8" x 8" x 8" deep floor sink manufactured out of 16 gauge, Type 304 stainless steel with anchor flange and slotted heavy duty stainless steel grate with bead blasted finish and sediment bucket. Grate free area of 26 square inches. Bottom outlets are available in 3" or 4" no hub outlet connections and fabricated as part of the floor sink.

Function: Used in industrial, commercial, kitchen and other hygienic areas. Type 304 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. All grate openings are polished to a smooth finish. Deep sump ideal for installations that require a sediment bucket to receive debris.

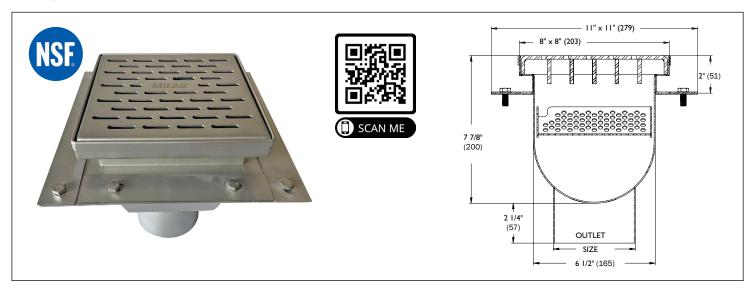

MODEL	DESCRIPTION	WEIGHT Lbs.
P4083	8" x 8" x 8" Deep, Type 304 Stainless Steel Fabricated Floor Sink and Sediment Bucket, 16 Gauge body and heavy duty load rated grate with 3" No Hub outlet.	17
P4084	8" x 8" x 8" Deep, Type 304 Stainless Steel Fabricated Floor Sink and Sediment Bucket, 16 Gauge body and heavy duty load rated grate with 4" No Hub outlet.	17

ANSI A112.21.1M Point Drain Heavy Duty Load Rated 5,000 - 7,499 Lbs.

SUFFIX	OPTIONAL VARIATIONS	-BW	Butt weld outlet connection (3" or 4")
-6	Vandal Proof	-C	Membrane Clamp (includes anchor flange)
-7	1/2" Trap Seal Primer connection	-F4	4" Round Type 304 Stainless Steel funnel
-7MG	MI-GARD Trap Seal Protection device (3" or 4")	-G	4" x 9" Oval Type 304 Stainless Steel funnel
-29	Type 316 Stainless Steel	-NS	Anti-slip grate
-150	1/2 Grate	-T	Threaded outlet
-175	3/4 Grate		

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880