Location:



P6260


6" Wide, Stainless Steel Frame and Grate System

SPECIFICATION:

MIFAB® Series P6260, 6" wide, Load Class "A" Light duty slotted trench drain ADA compliant grate constructed of Type 304 stainless steel with 10 gauge stainless steel angle frame and anchor tabs. Free area of 10.00 square inches per 1' section. Also available with B, C, D and E load rated stainless steel grates and optional anchor flange (Suffix –FL).

FUNCTION:

Used in industrial, commercial, kitchen and other hygienic areas. Type 304 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. All grate openings are polished to a smooth finish.

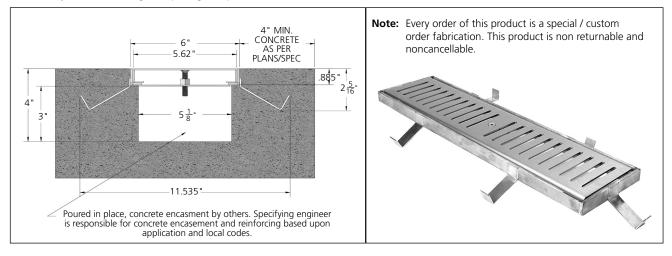

MODEL NUMBER	DESCRIPTION	
P6260	6" wide, Type 304 Stainless Steel Frame and Grate System (Load Class "A", "Light Duty" ADA compliant grates)	
P6260-29	6" wide, Type 316 Stainless Steel Frame and Grate System (Load Class "A", "Light Duty" ADA compliant grates)	

OPTIONAL VARIATIONS	DESCRIPTION
Length	Specify the length that is required
-LCB	Load Class "B", Medium Duty Grate (2,000 - 4,999 lbs.)
-LCC	Load Class "C", Heavy Duty Grate (5,000 - 7,499 lbs.)
-LCD	Load Class "D", Extra Heavy Duty Grate (7,500 - 10,000 lbs.)
-LCE	Load Class "E", Special Duty Grate (over 10,000 lbs.)
-LS	Longitudinal Slotted Grate (ADA Compliant)
-NS	Slip Resistant Grate (Non slip grit finish)
-PG	Perforated Grate (1/4" diameter holes)
-PHP	Perforated "Heel Proof Grate" (less than 1/4" diameter perforations)
-SHP	Slotted "Heel Proof" Grate (less than 1/4" wide slots)
-5	Sediment Bucket
-6	Vandal Resistant Grate
-90	90 Degree Section

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.		
Job Name:	Page No: Contract:	
Schedule No:	Purchase Order No:	

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880