

Location: _____



SP


**SPOOLS AND SPACERS
2 1/2" THRU 10"**

Specification: Beeco Spools and Spacers are custom made to retrofit into existing field installations where a shorter length valve is being installed.

Function: Beeco Spools and Spacers are designed for retrofitting backflow prevention assemblies, Automatic Control Valves or other piping system installations into spaces where a longer lay length exists. Spools are available in fused bonded epoxy coated carbon steel and come standard with AWWA 150# class "D" carbon steel flanges.


Features: The Beeco Spools and Spacers can be made in lengths 4" and up and can be either Flanged by Flanged, Grooved by flanged or grooved by Grooved configuration.

Material: Maximum working water pressure 175 PSI, Maximum working temperature 140° F Hydrostatic test pressure 350 PSI, Flanged end connection meet ANSI B16.1 and all grooved dimensions comply with AWWA C606.

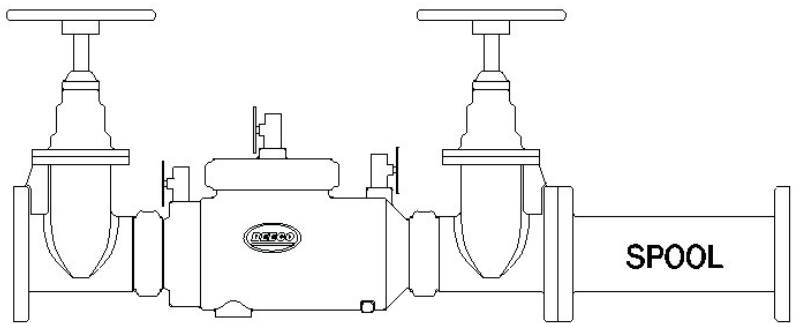

BEECO VALVE WITH SPOOL

Over all length of the complete assembly including the gate valves.

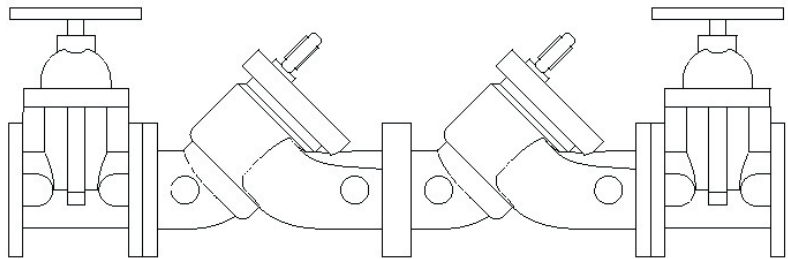

OLD VALVE

Flange Size	Flanged X Flanged	Flanged X Grooved	Grooved X Grooved	Length +/- 1/16"
SP2.50				
SP3.00				
SP4.00				
SP6.00				
SP8.00				
SP10.00				

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____