

Location: _____




T1360-FL-TH

12" WIDE, PRESLOPED FABRICATED STEEL TRENCH DRAIN SYSTEM WITH "V" BOTTOM

Specification: MIFAB® Series T1360-FL-TH, 12" wide, 36" long, (or length as needed), pre-sloped (1/8" per foot) modular trench drain with "V" shaped bottom. Body is manufactured from 14 gauge steel and finished with an acid resistant powder epoxy coating. Each body has a 3" wide anchor flange on each side recessed 2 3/4" down from the top with one side sloped to position on top of the precast concrete slab adjoining the drain (Specify this dimension). Bodies have flanged ends to connect to each other with a neoprene rubber gasket in between. End and bottom outlets are available in 2", 3", 4" or 6" no hub outlet connections and are fabricated as part of the trench drain system. 12" long, Class E, H-20 ductile iron grates are provided as standard (Suffix -4). Catch basins are also available.

Function: Used in prefabricated parking garages where the sloped and horizontal precast construction sections meet. Extra wide 3" anchor flange is designed to install over precast concrete slabs. 2 3/4" depth from the anchor flange to the top of the drain allows for concrete to secure the drain system within the slab.

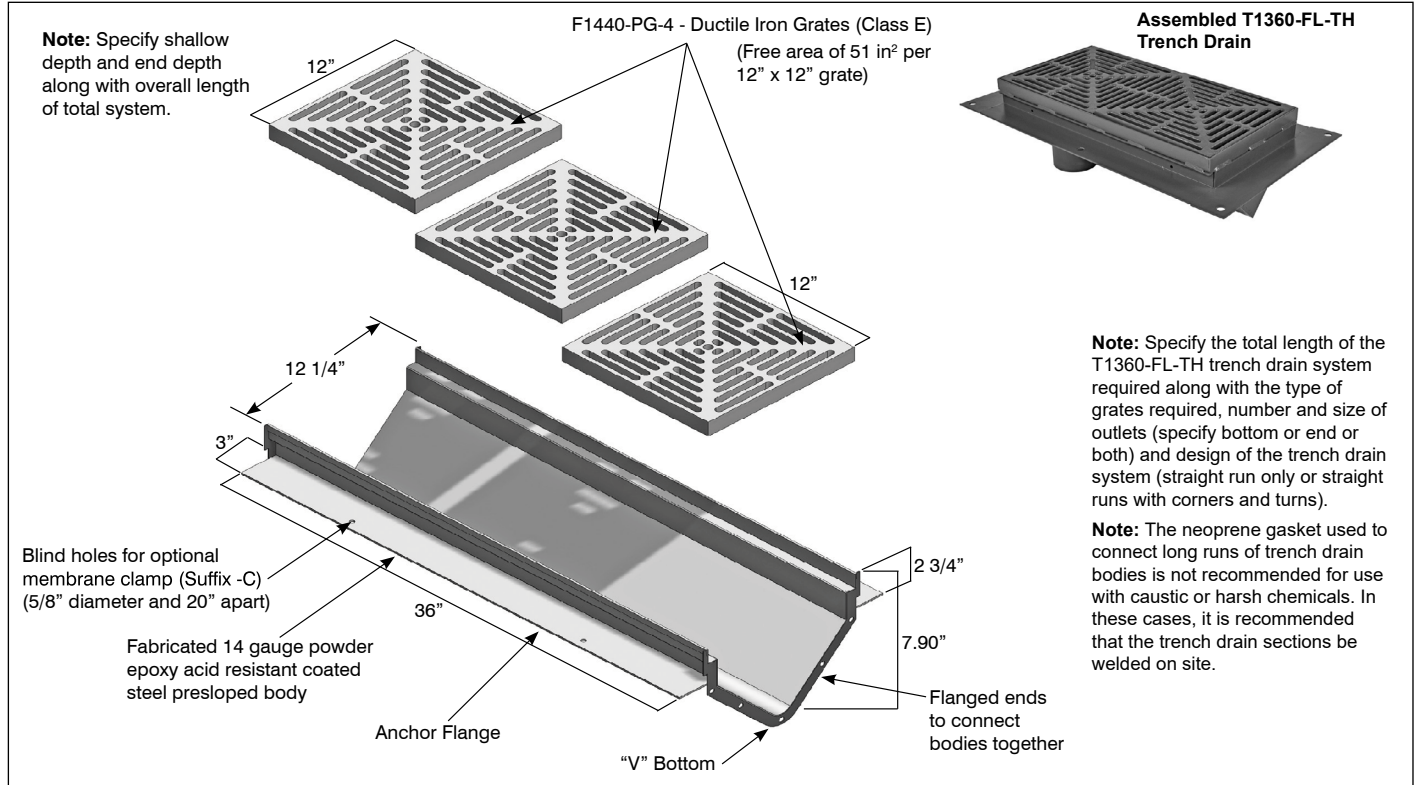

Note: Specify shallow depth and end depth along with overall length of total system.

Blind holes for optional membrane clamp (Suffix -C) (5/8" diameter and 20" apart)

Fabricated 14 gauge powder epoxy acid resistant coated steel presloped body

Anchor Flange

"V" Bottom



Assembled T1360-FL-TH Trench Drain

Note: Specify the total length of the T1360-FL-TH trench drain system required along with the type of grates required, number and size of outlets (specify bottom or end or both) and design of the trench drain system (straight run only or straight runs with corners and turns).

Note: The neoprene gasket used to connect long runs of trench drain bodies is not recommended for use with caustic or harsh chemicals. In these cases, it is recommended that the trench drain sections be welded on site.

Ductile Iron Grates (all 12" x 12". Three grates required per body section)	
Suffix	Description
-BA	Buy American Act compliant product
-PA	Pennsylvania Steel Act compliant product
-4	"Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-4-3	"Special Duty" Ductile Iron slotted grate (Standard) Load Class E with Type 304 Stainless Steel Veneer.
-4-11	A.R.E. coated "Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-4-13	Galvanized coated "Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)
End caps / Outlets / Accessories	
-PEC	Closed end cap
-PEO2	2" no hub end outlet
-PEO3	3" no hub end outlet
-PEO4	4" no hub end outlet

-PEO6	6" no hub end outlet
-PBO2	2" no hub bottom outlet
-PBO3	3" no hub bottom outlet
-PBO4	4" no hub bottom outlet
-PBO6	6" no hub bottom outlet
-PBDS	Bottom dome strainer
-PGLVP	Vandal resistant grate lockdown hardware (Suffix -6) (per grate)
Fabrications	
-TEE	Fabricated Steel tee
-PB-45	45 Degree Body Section
-PB-90	90 Degree Body Section
-45	45 Degree Ductile Iron Slotted grate - Class E
-90	90 Degree Ductile Iron Slotted grate - Class E
-SOF	Side Outlet Fabrication
-CF	Cross Fabrication
-PB-3	Fabricated T1360-FL- body with Type 304 Stainless Steel overlay on frame of body.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____