
Location: _____


MIFAB® F1360-Y-Q

FLOOR DRAIN WITH 16" ROUND NON ADJUSTABLE TRACTOR GRATE

Specification: MIFAB® Series F1360-Y-Q, lacquered cast iron shallow sump floor drain with anchor flange and non adjustable grate top assembly with standard 1” (25) thick, 16” round, (specify material finish) ADA compliant, heel proof, ductile iron tractor grate with 1/4" wide slots.

Function: Used in heavy traffic areas such as parking garages, factories and loading docks. Shallow body is ideal for poured in place concrete decks where space is limited.

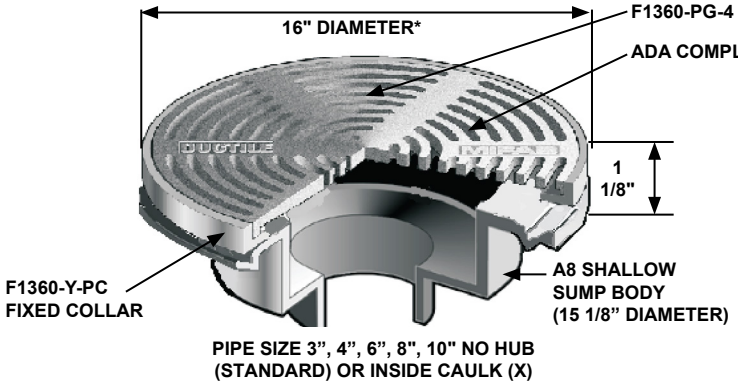

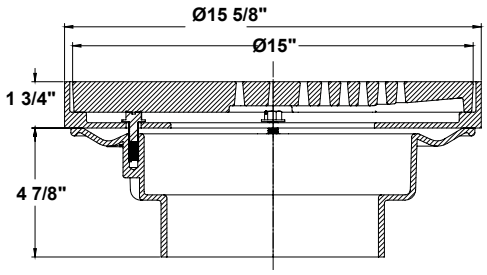

F1360-Y-Q Series meets ANSI/ASME floor drain standard A112.6.3-2001

Note: Free Area 68.9 in2 (44,452 mm2)

(*) DENOTES STRAINER FINISH (-1, -3 OR -4)

***ADD 1/2" TO DIAMETER & 3/16” TO HEIGHT FOR NB, SS VENEER**

PIPE SIZE	BODY HEIGHT			
	NO HUB (STANDARD)	INSIDE CAULK (X)	PUSH ON (P)	THREADED (T)
2" (52)	4 1/8" (105)	-	-	-
3" (76)	4 1/8" (105)	5.05" (128)	4 9/16" (117)	-
4" (102)	4 1/8" (105)	5.05" (128)	4 5/8" (118)	4 1/8" (105)
5" (125)	-	5.05" (128)	-	4 1/8" (105)
6" (152)	4 1/8" (105)	5.05" (128)	4 7/8" (124)	4 1/8" (105)
8" (203)	4 7/8" (124)	-	-	-
10" (254)	4 7/8" (124)	-	-	-

	SUFFIX	OPTIONAL VARIATIONS
☐	-1	Nickel bronze strainer (veneer)
☐	-3	Stainless steel strainer (veneer)
☐	-4	Ductile iron strainer (Standard)
☐	-5	Sediment bucket
☐	-6	Vandal proof secured grate (TR30 Torx and Pin)
☐	-7	1/2" trap seal primer connection
☐	-8	Backwater valve (2", 3", 4")
☐	-11	Acid resistant epoxy coated body
☐	-12	Galvanized top assembly
☐	-13	Galvanized body
☐	-15	Extension
☐	-16	Square Top
☐	-21	Secondary flat stainless steel strainer (2", 3", 4")
☐	-28	Stainless steel body (Type 304)
☐	-34	Closure plug

☐	-40	Underdeck clamp
☐	-41	Sump receiver
☐	-50	Lacquered cast iron funnel
☐	-95	Client logo
☐	-BA	Buy American Act compliant product
☐	-F4	4" Round funnel
☐	-F6	6" Round funnel
☐	-G	Oval 4" x 9" funnel
☐	-J	6” x 3” x 1” funnel
☐	(Standard)	No hub outlet
☐	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
☐	-P	Push on outlet (3", 4", 6")
☐	-PSA	Pennsylvania Steel Act compliant product
☐	-T	Threaded outlet (4", 5", 6")
☐	X	Inside caulk outlet (3", 4", 5", 6")
☐	-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB *reserves the right to make changes in material and design without formal notice and obligation.*

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880