
Location: _____

MIFAB® F1820 LARGE PLANTING AREA DRAIN


Specification: MIFAB® Series F1820 lacquered cast iron deep sump large planting area drain with anchor flange, cast iron waterproofing membrane clamp ring, and low profile, self-locking aluminum dome strainer with stainless steel mesh screen.

Function: Used to drain water that accumulates in planting or flower boxes. The stainless steel mesh covered aluminum dome prevents fines from entering the drain line.

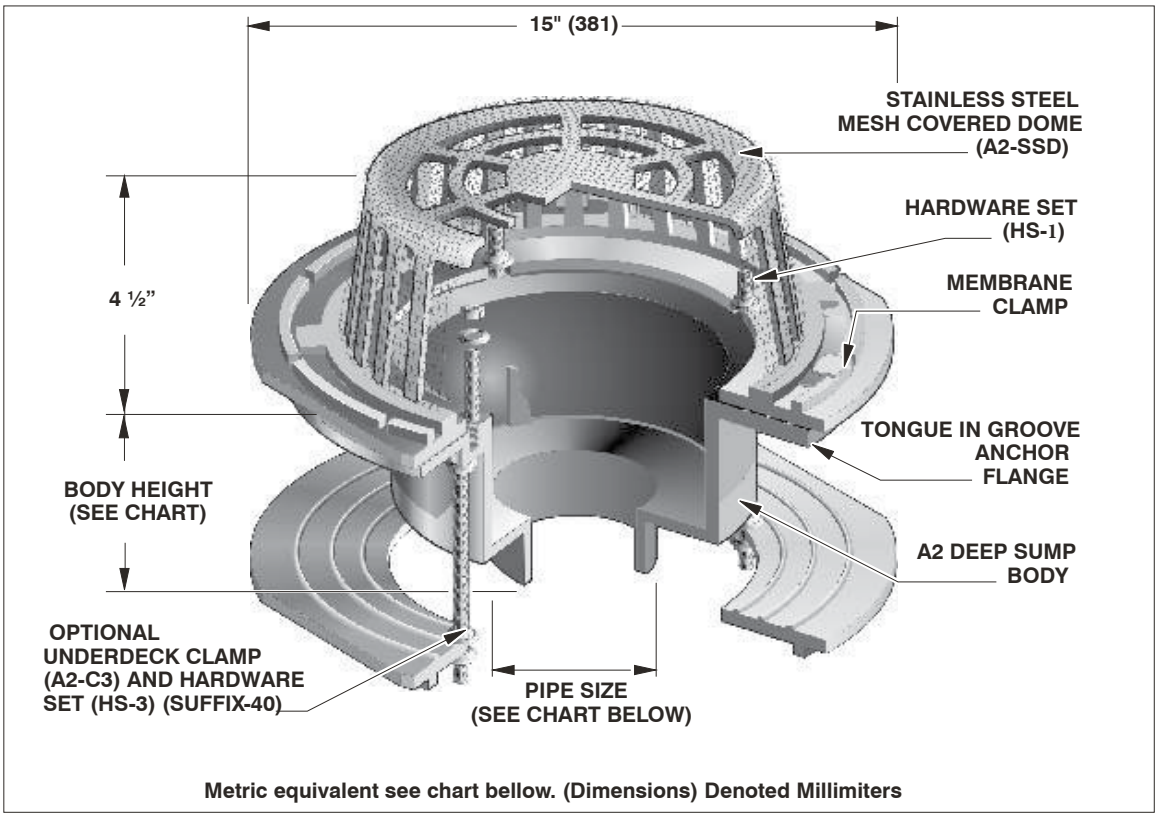

Metric equivalent see chart bellow. (Dimensions) Denoted Millimiters

PARTS:


A2 BODY


A2-SSD


A2-C3


HS-1

F1820 Series meets ANSI/ASME floor drain standard A112.6.3-2001

STRAINER DIAMETER	ANSI/ASME RATING		PIPE SIZE	Weight (Lbs.)	BODY HEIGHT				
	FREE AREA	LOAD RATING N.B. (-1) / S.S. (-3) / D.I. (-4)			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS(-31)
15" dia. aluminum dome with stainless steel mesh screen	Refer to catalog rating	ANSI/ASME A112.6.3-2001	◉ 2" (51)	Refer to model listing	☐ 5 3/4" (146)	☐ 5 1/2" (140)	☐ 6 1/2" (165)	☐ 6 1/2" (165)	☐ 6 3/4" (171)
			◉ 3" (76)		☐ 5 3/4" (146)	☐ 5 1/2" (140)	☐ 6 5/8" (168)	☐ 6 1/2" (165)	☐ 7 1/2" (191)
			◉ 4" (102)		☐ 5 3/4" (146)	☐ 5 1/2" (140)	☐ 5 1/2" (140)	☐ 6 1/2" (165)	☐ 7 5/8" (194)
			◉ 5" (127)		-	—	☐ 6 5/8" (168)	☐ 6 3/4" (171)	—
			◉ 6" (152)		☐ 7 1/4" (184)	☐ 5 5/8" (143)	☐ 5 5/8" (143)	☐ 6 1/2" (165)	—
			◉ 8" (203)		☐ 5 7/8" (149)	—	—	—	—

SUFFIX	OPTIONAL VARIATIONS
☐ -6	Security screws (T-20 Torx & pin)
☐ -11	Acid resistant epoxy coated body
☐ -13	Galvanized body
☐ -15	Extension
☐ -28	Stainless steel body and grate (Type 304)
☐ -30	PVC socket connection body
☐ -31	ABS socket connection body
☐ -40	Underdeck clamp
☐ -41	Sump receiver
☐ -81	Rough bronze dome with S.S. mesh

SUFFIX	OPTIONAL VARIATIONS
☐ -90	Threaded side outlet (2", 3", 4")
☐ -90NH	No hub side outlet (2", 3", 4")
☐ -BA	Minimum 51% material cost made in the USA
☐ (Standard)	No hub outlet
☐ -MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
☐ -P	Push on outlet
☐ -PSA	Pennsylvania Steel Act compliant product
☐ -T	Threaded outlet (2",3",4")
☐ -X	Inside caulk outlet

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB *reserves the right to make changes in material and design without formal notice and obligation.*